



50 Ohm N Isolator Operating From 135 MHz to
175 MHz And 150 Watts With 20 dB Isolation

TECHNICAL DATA SHEET

PE8322

Configuration

Connector 1	N Female
Connector 2	N Female
Frequency Range	135 MHz to 175 MHz
Design	Isolator

Electrical Specifications (Values at 25°C, sea level)

Description	Minimum	Typical	Maximum	Units
Frequency Range	135		175	MHz
Impedance		50		Ohms
Insertion Loss			0.5	dB
Forward Power			150	Watts
Reverse Power			100	Watts
Input VSWR			1.3:1	
Isolation	20			dB

Mechanical Specifications

Temperature

Operating Range	-30 to 70 deg C
-----------------	-----------------

Size

Length	4.4 in [111.76 mm]
Width	3 in [76.2 mm]
Height	1.2 in [30.48 mm]

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

Plotted and Other Data

Notes:

- Values at 25 °C, sea level
- Includes internal 100 Watt Termination. Isolation 16.5dB at -10C to -30C and 17dB from +60C to +70C. Insertion Loss .7dB from -10C to -30C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm N Isolator Operating From 135 MHz to 175 MHz And 150 Watts With 20 dB Isolation PE8322](#)




50 Ohm N Isolator Operating From 135 MHz to 175 MHz And 150 Watts With 20 dB Isolation

TECHNICAL DATA SHEET

PE8322

Outline Drawing

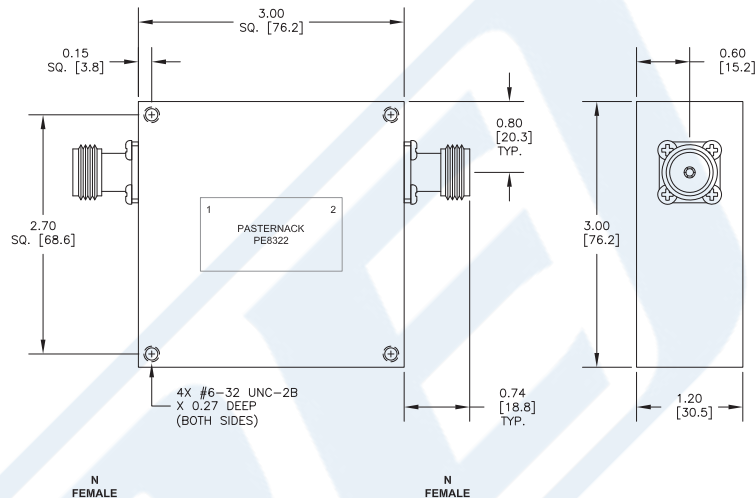

50 Ohm N Isolator Operating From 135 MHz to 175 MHz And 150 Watts With 20 dB Isolation from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm N Isolator Operating From 135 MHz to 175 MHz And 150 Watts With 20 dB Isolation PE8322](http://www.pasternack.com/50-ohm-n-isolator-135-175-mhz-150-watts-20-db-pe8322-p.aspx)

URL: <http://www.pasternack.com/50-ohm-n-isolator-135-175-mhz-150-watts-20-db-pe8322-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.