


1 2 3 4 5 6

No.	Revision	Date	Sign
△			
△			

SMA ST PLUG
(Anti-torque)
Coupling/sus+passivated
Body/Brass+Gold

N B/H JACK
with SEAL

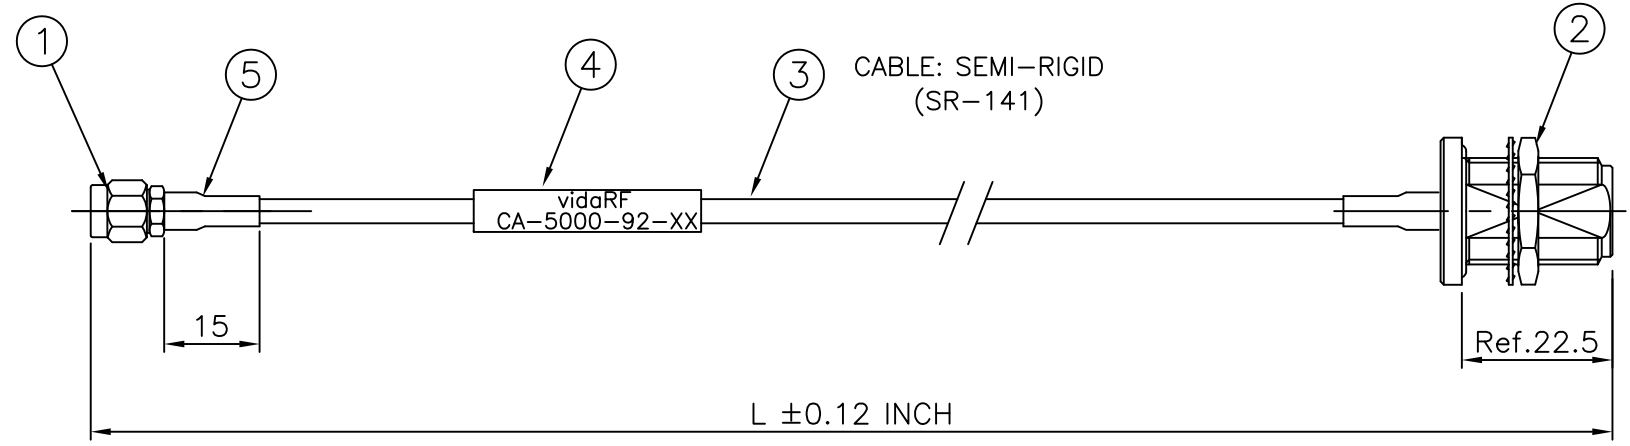

P/N	L (inch)
-02	2
-03	3
-04	4
-05	5
-06	6
-07	7
-08	8
-09	9
-10	10
-11	11
-12	12
-13	13

P/N	L (inch)
-14	14
-15	15
-16	16
-17	17
-18	18
-19	19
-20	20
-21	21
-22	22
-23	23
-24	24
-25	25

P/N	L (inch)
-26	26
-27	27
-28	28
-29	29
-30	30
-31	31
-32	32
-33	33
-34	34
-35	35
-36	36



5	Bonding tube	1	GSHS-3635W	Black-15mm
4	Marking tube	1	GSHS-1625	
3	COAX CABLE	1	SR-141	
2	CONNECTOR(N-BJ)	1	1N-402-00	Nickel Plated
1	CONNECTOR(SMA-SP)	1	1S-102-AT01	
NO.	DESCRIPTION	Q'TY	PART NO.	REMARKS.
PARTS No. CA-5000-92-XX		NAME SEMI-RIGID 0.141" CABLE		APPROVED S.K
TOLERANCES OTHERWISE SPEC. ±2mm ANGLES ±1°				CHECKED
SCALE	UNIT	mm		DESIGNED T.P
DWG NO. CA-5000-92-XX			DATE. 8/23/09	

CUSTOMER


 Tel: 877-777-8432
 www.vidaRF.com