


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

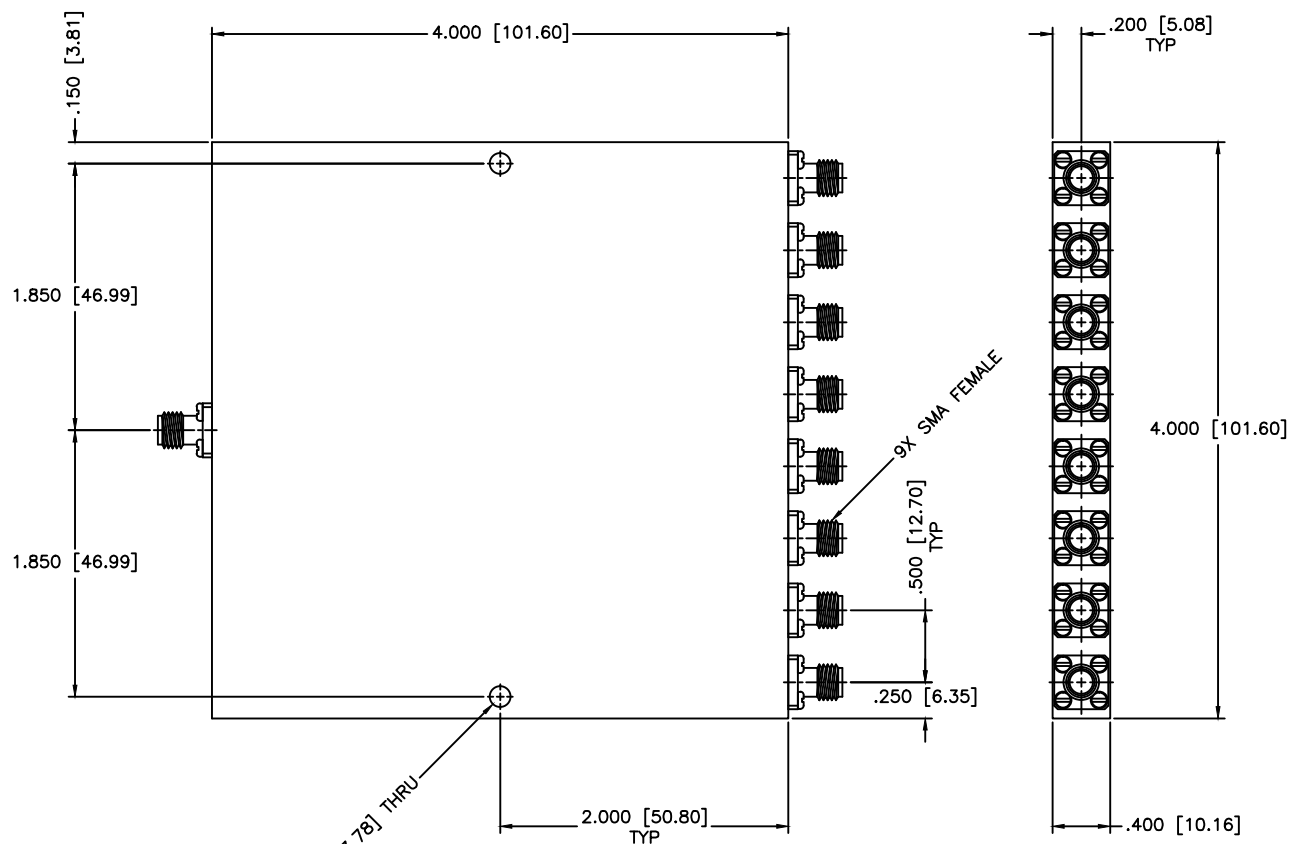

SPECIFICATIONS

Frequency Range: 2–8 GHz
 VSWR In/Out: 1.60:1/1.60:1 Max.
 Insertion Loss: 1.2dB Max.
 Isolation: 17dB Min.
 Phase Balance: ± 10 Deg. Max.
 Amplitude Balance: ± 0.7 dB Max.
 Power Rating: 20W (Load vswr @ 1.2)

2X ϕ .149 [3.78] THRU

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
				SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:			
		8-WAY POWER DIVIDER			
DRAWN: Paiboon Luekhamhan		DATE: 06-18-1998		PART NO.	
APPROVED: T. Nguyen		DATE: 06-18-1998		PS8-8	
THIRD ANGLE PROJECTION		CAGE CODE:	SIZE:	REV:	DWG. NO.
		OD2L5	N/A	N/A	80248
		DO NOT SCALE THE DRAWING			