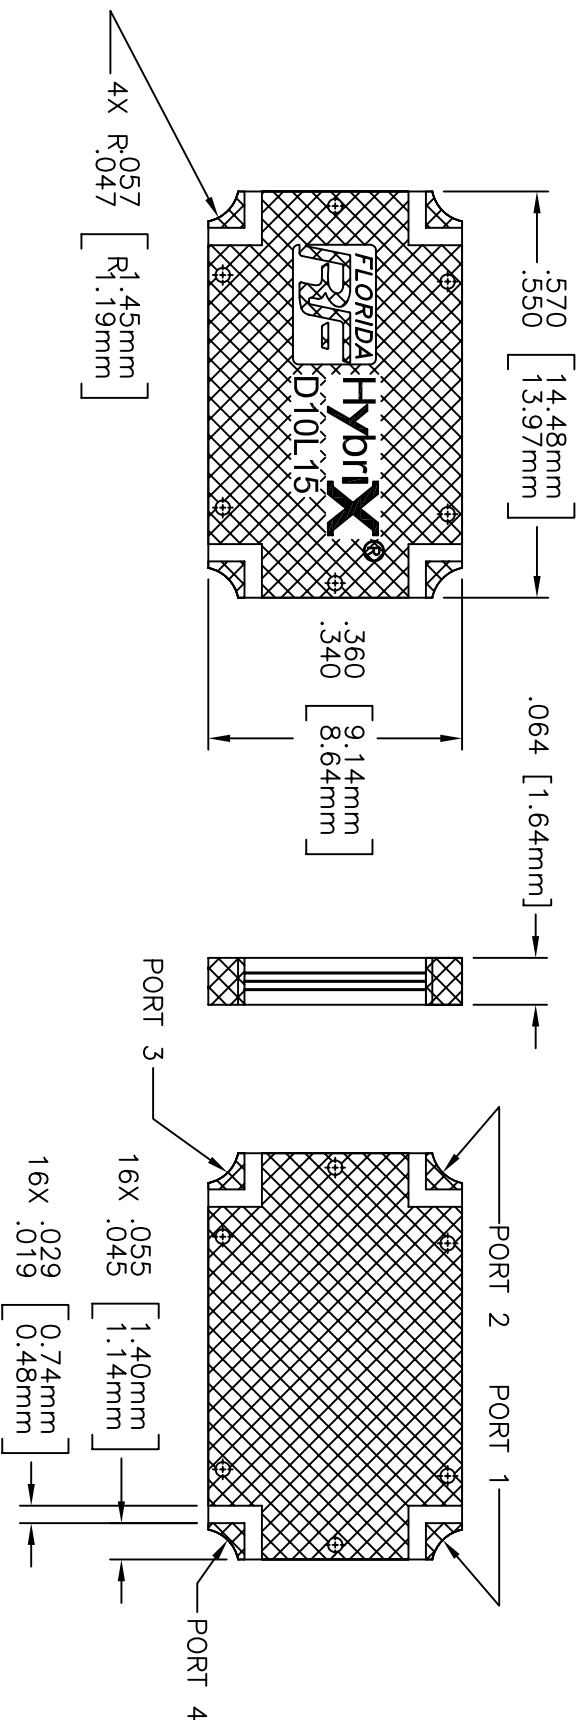


EDD

DRAWING NO.:		REV.	
D10L15		C	
CONFIGURATION			
PORT 1	PORT 2	PORT 3	PORT 4
INPUT	OUTPUT	ISOLATED	COUPLED
OUTPUT	INPUT	COUPLED	ISOLATED
ISOLATED	COUPLED	INPUT	OUTPUT
COUPLED	ISOLATED	OUTPUT	INPUT

- NOTES:
1. FREQUENCY: 2.0–2.3 GHz
ISOLATION (MIN): 34 dB
INSERTION LOSS (MAX): 0.4 dB
VSWR (MAX): 1.25:1
COUPLING: 15.5 ± 0.7 dB
RIPPLE (MAX): ±0.2 dB
POWER HANDLING: 100 WATT MAX CONTINUOUS @85°C MAX
OPERATING TEMPERATURE RANGE: –55°C TO +85°C

[illegible]