


剥线尺寸
stripping dimensions

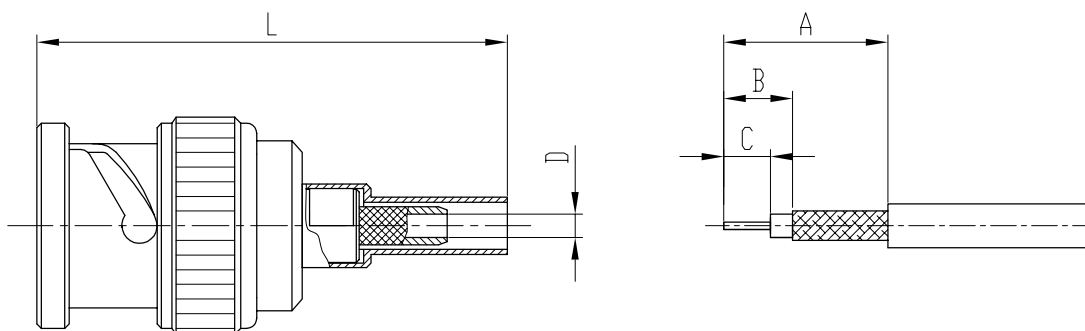

产品型号 type	电缆型号 cable type	A	B	C	D	L
BNC-J3YA	SFF-50-1.5-1、RG316/U	11.2	4.7	3.2	Ø1.6	29.3
BNC-J5Y	SFF-50-3-1、RG141A/U	15.5	5.5	3.0	Ø3.1	31.3

Electrical Characteristics:

1. Characteristic Impedance: 50 Ω
2. Frequency range: DC~4Ghz
3. Contact resistance
Center conductor: $\leq 1.5 \text{ m}\Omega$
Out conductor: $\leq 0.2 \text{ m}\Omega$
4. Insulation resistance: $\geq 5000 \text{ M}\Omega$
5. Insulator withstanding: 1500V
6. VSWR: ≤ 1.5
7. Durability: 500cycles

主要性能指标:

1. 特性阻抗: 50 Ω
2. 频率范围: DC~4Ghz
3. 接触电阻:
中心导体: $\leq 1.5 \text{ m}\Omega$
外导体: $\leq 0.2 \text{ m}\Omega$
4. 绝缘电阻: $\geq 5000 \text{ M}\Omega$
5. 介质耐压: 1500V
6. 电压驻波比: ≤ 1.5
7. 插拔次数: 500次

Application: MIL-C-39012/16E


执行标准: MIL-C-39012/16E

Material&Finishing

1. Center contact :
Male: brass, gold plated
2. Bodies and other metal parts:
brass, nickel plated
3. Crimp ferrule: copper, nickel plated
4. Insulators: PTFE

材料和镀层

1. 中心接触件:
插针: 黄铜, 镀金
2. 壳体和其它金属零件:
黄铜, 镀镍
3. 线夹: 黄铜, 镀镍
4. 绝缘子: 聚四氟乙烯

	SCALE	
	2:1	
NAME	DATE	
DRAWN		
CHECKED		
APPROVED		

BNC-J3YA
RF COAXIAL CONNECTOR

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE
FRACTIONS DECIMALS ANGLES
.XX ± .15 ±1°
.XX ± .05
.XXX ±

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO., LTD.