

ISSUE 2; October 2015

Description

- Standard 1.6 x 1.2mm crystal oscillator in a ceramic package with a seam sealed metal lid, hermetically sealed

Frequency Parameters

- Frequency: 1.0MHz to 80.0MHz
- Frequency Stability: $\pm 30.00\text{ppm}$ to $\pm 100.00\text{ppm}$
- Ageing: $\pm 5\text{ppm}$

Electrical Parameters

- Supply Voltage: $2.5\text{V} \pm 10\%$
- Standby Current: $10\mu\text{A}$ max

Operating Temperature Ranges

- 20 to 70°C
- 40 to 85°C

Output Details

- Output Compatibility: CMOS
- Drive Capability: 15pF max

Output Control

- Logic '1' ($\geq 70\%V_S$) to pad 1 enables oscillator output
- Logic '0' ($\leq 30\%V_S$) to pad 1 disables oscillator output; when disabled the oscillator output goes to the high impedance state
- No connection to pad 1 enables oscillator output

Environmental Parameters

- Shock: IEC 60068-2-27: 1000G, 1ms, 3 times in each of 3 mutually perpendicular planes
- Vibration: IEC 60068-2-6: 1.5mm amplitude, 10Hz-55Hz, 1min in 3 mutually perpendicular planes, duration 2hrs each plane (total 6hrs)
- Storage Temperature Range: -40 to 85°C

Ordering Information

- Frequency*
- Model*
- Output
- Frequency Stability*
- Operating Temperature Range*
- Supply Voltage
- (*minimum required)
- Example
- 10.0MHz IQXO-641
- CMOS $\pm 50\text{ppm}$ -20 to 70°C 2.5V


Compliance

- RoHS Status (2011/65/EU): Compliant
- REACH Status: Compliant
- MSL Rating (JDEC-STD-033): Not Applicable


Packaging Details

- Pack Style: Bulk: Loose in bulk pack
- Pack Size: 100
- Pack Style: Reel: Tape & reel in accordance with EIA-481-D
- Pack Size: 3,000


Outline (mm)

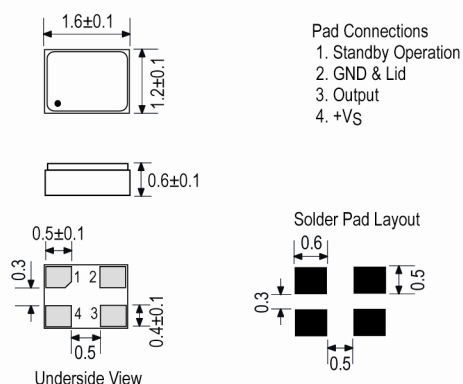

Test Circuit

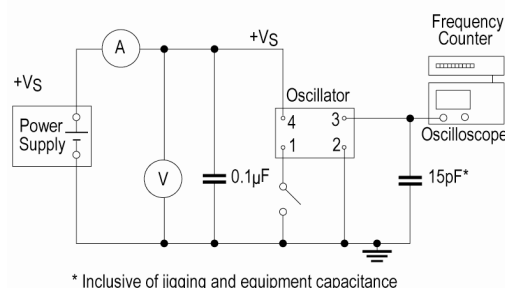

Wave Form

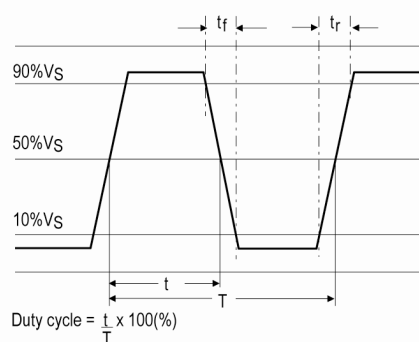

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1 408.273.4530

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Electrical Specification - maximum limiting values 2.5V $\pm$ 10%

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
1.0MHz	20.0MHz	-20 to 70	$\pm$ 30.0	3	5	45/55
		-40 to 85	$\pm$ 50.0	3	5	45/55
20.000001MHz	40.0MHz	-20 to 70	$\pm$ 30.0	5	5	45/55
		-40 to 85	$\pm$ 50.0	5	5	45/55
40.000001MHz	60.0MHz	-20 to 70	$\pm$ 30.0	7	5	45/55
		-40 to 85	$\pm$ 50.0	7	5	45/55
60.000001MHz	80.0MHz	-20 to 70	$\pm$ 30.0	9	5	45/55
		-40 to 85	$\pm$ 50.0	9	5	45/55

This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1 408.273.4530

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com