

PART NO. : WVX-3300P-200A44

◆ APPLICATION

> 3.3GHz Band System

◆ FEATURE

> High Reliability
> **RoHS Compliant**



◆ ELECTRICAL SPECIFICATION

ITEM	SPECIFICATION
Frequency Range (MHz)	3,200 ~ 3,400 MHz
Operating Bandwidth(MHz)	200
Insertion Loss in BW	1.5dB Max.
Ripple	1.0dB Max.
Return Loss in BW	15.0dB Min.
Rejection	30dB Min. @3,010MHz 30dB Min. @3,780MHz
Input Power	3 Watt Max
In/Out Impedance	50 Ohms Nominal

◆ ENVIRONMENTAL SPECIFICATIONS

ITEM	SPECIFICATION
Operating Temperature Range	-40°C to +85°C
Dimension	13.0 X 12.0 X 5.0 (mm)
Filter Type / Resonator Poles	Monoblock PCB / 4mm 4Pole

◆ OUTLINE DRWAING

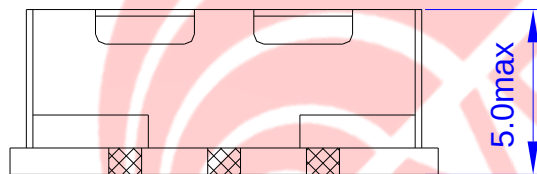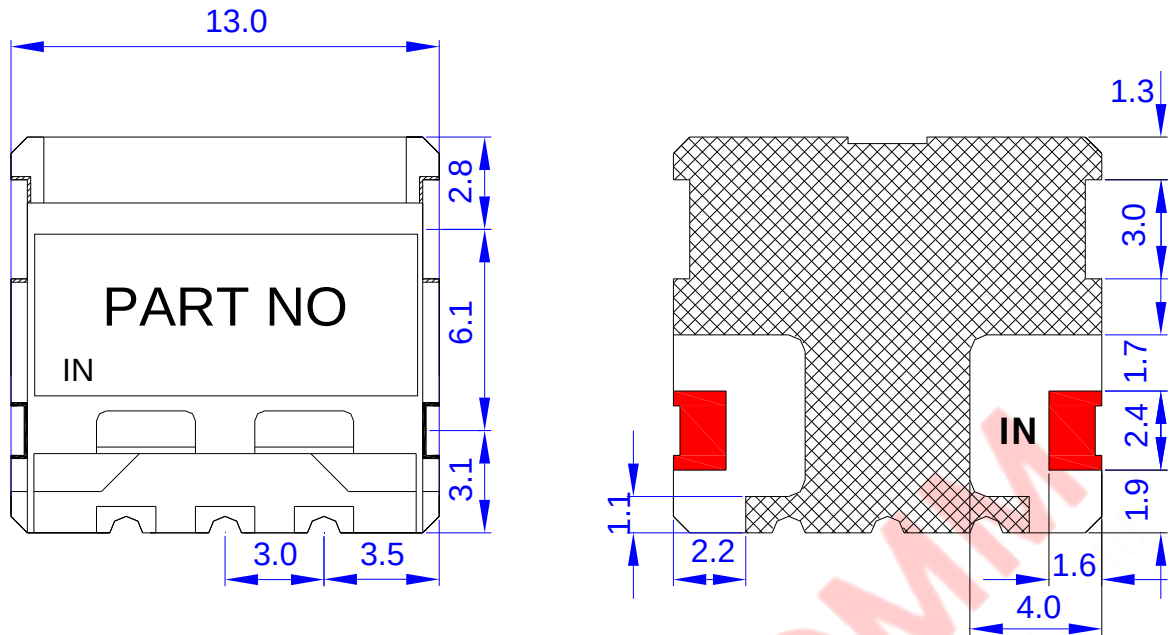

TOLERANCE
UNLESS
SPECIFIED : +/-0.2 mm