

4

3

2

1

D

D

C


C

B

B

A

A

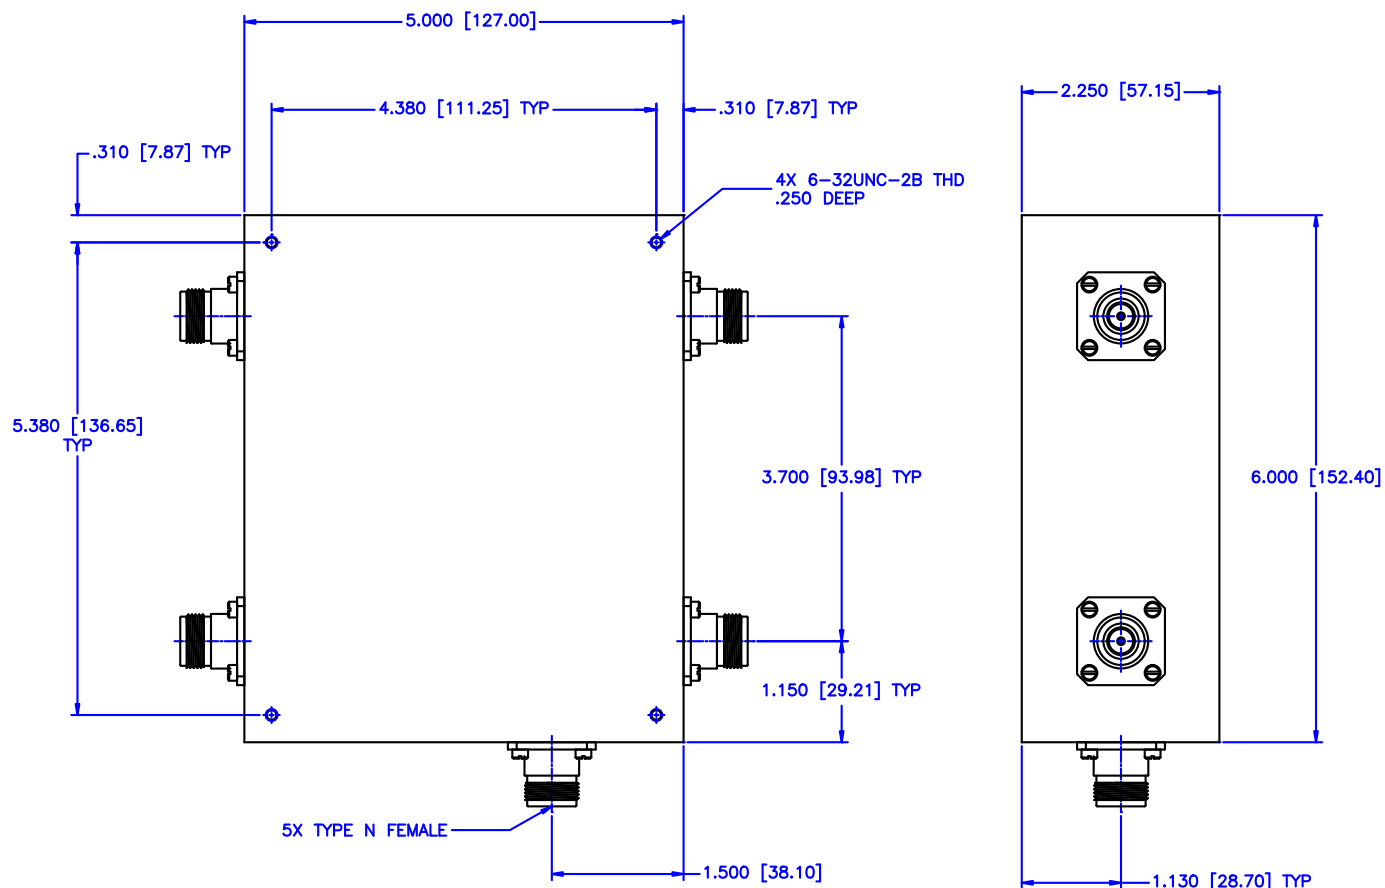

SPECIFICATIONS:

Frequency Range:	1-500 MHz
Insertion Loss:	0.8dB Max.
Isolation:	25dB Min.
Power:	100 Watts CW
Amplitude Balance:	0.70dB Max.
VSWR:	1.40:1 Max.
Phase Balance:	5 Deg Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com		SCALE: N/A
DRAWING:		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DATE: 02-03-2011		DRAWING TITLE: 4-WAY POWER DIVIDER/COMBINER		PART NO. PLH4-26
APPROVED: T. Nguyen		CAGE CODE: 0D2L5		SIZE: N/A REV: N/A DWG NO. 85328
DO NOT SCALE THE DRAWING				