


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

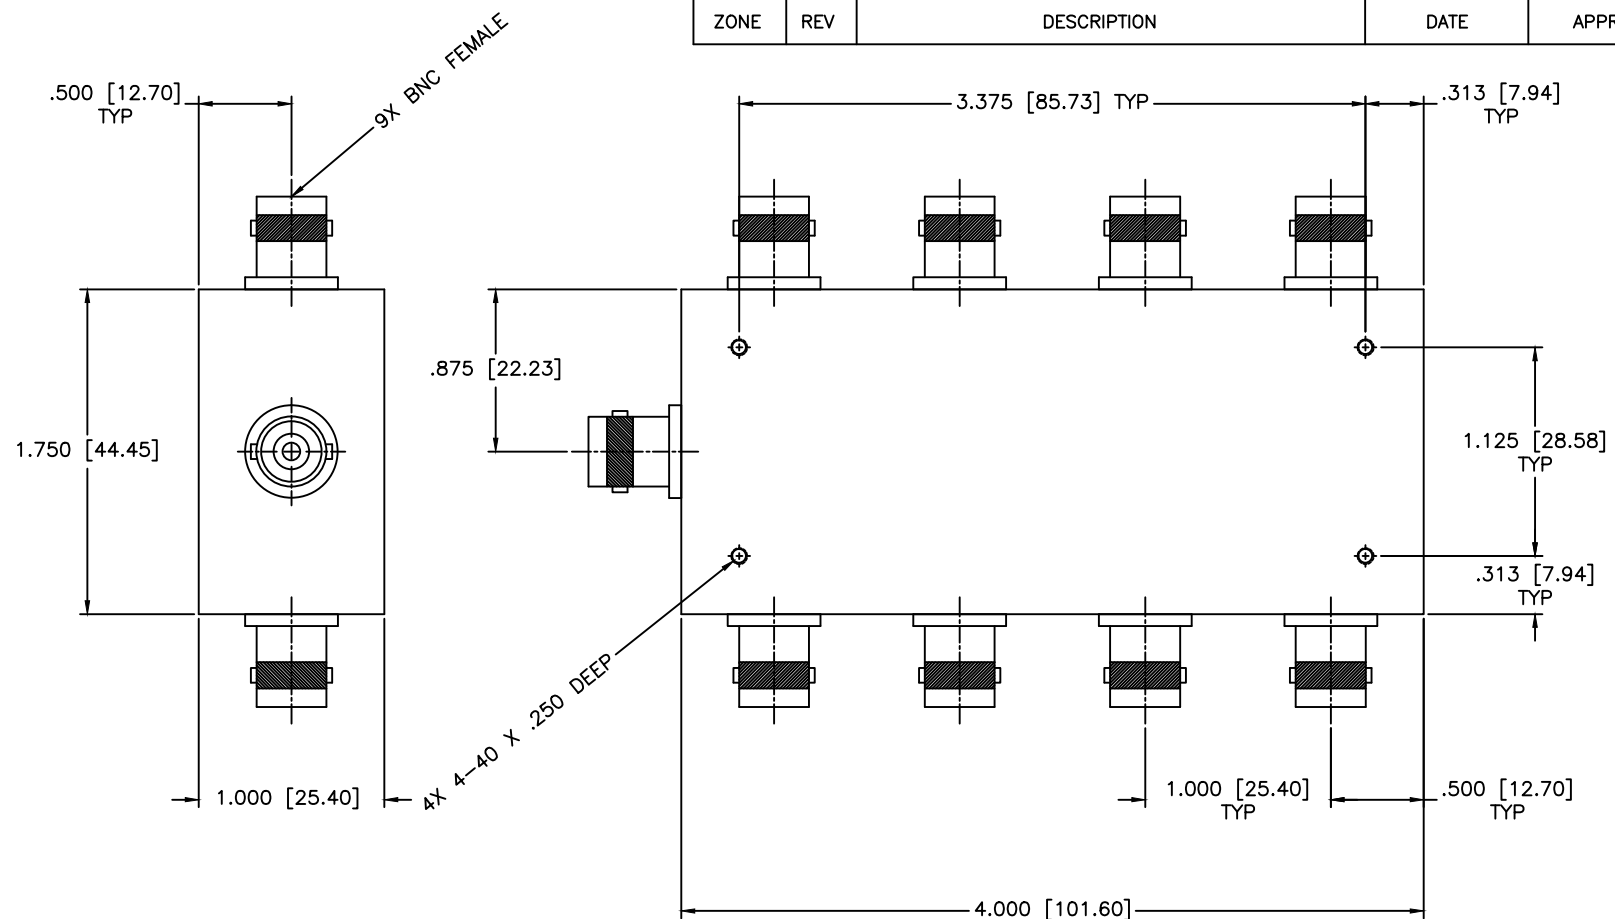

SPECIFICATIONS

Frequency Range: .01–100 MHz
 Isolation: 23 dB Min.
 VSWR: 1.40:1 Max.
 Insertion Loss: 1.6 dB Max.
 Amplitude Balance: ± 0.6 dB Max.
 Phase Balance: ± 3 Deg. Max.

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ± 0.05 ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 8-WAY LUMPED ELEMENT POWER DIVIDER			
		PART NO. PL8-1/BNC			
DRAWN: Paiboon Luekhamhan	DATE: 04-03-2006	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE: OD2L5	SIZE: A
APPROVED: T. Nguyen	DATE: 04-03-2006			REV: N/A	DWG NO. 80565
THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING			