


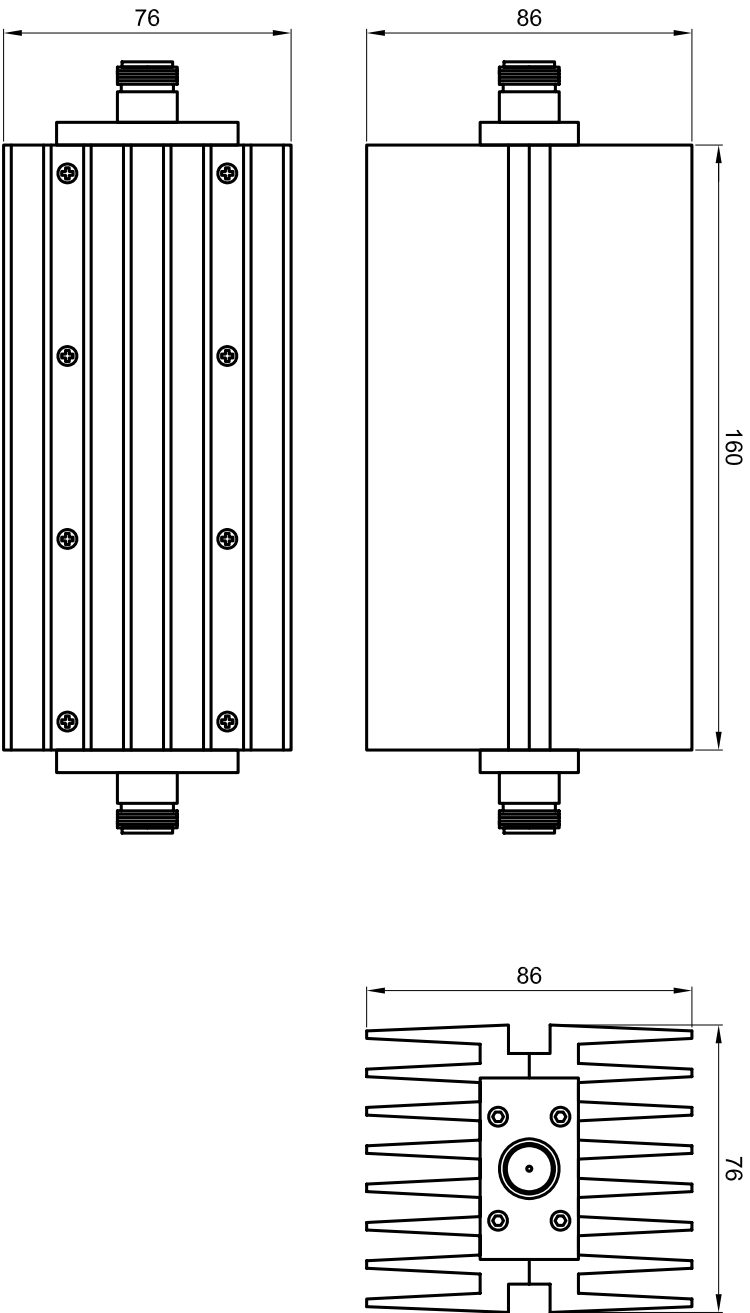

Specification:

1. Nominal Impedance: 50 Ω
2. Frequency Range: DC-6GHz
3. Nominal Attenuation & Error: 30 $\pm$ 1.2dB@DC-4GHz, 30 $\pm$ 1.2dB@4-6GHz
4. VSWR: 1.25@DC-4GHz, 1.35@4-6GHz
5. Power Rating: 100W (CW)
6. Connector: Nf-Nf, Stainless Steel, gold plated beryllium copper contacts

步骤/项目	数量	审核/名称、材料、规格、备注	图号	525.0914
设计	DESIGNED_ZYY	校对	CHECKED_ZH	审核 - 日期
批准	APPROVED_	文件名称	FILENAME	日期
10/7/9	比例	1:2		
BXT Technologies		30dB/100W/6GHz/NF-NF		
Tel:0591-83789500		30A-1006-44B		
www.bxt-technologies.cn		版本		
		EDITION		
		SHEET		