


COMPONENTS	IMPEDANCE
SMA MALE	50 OHM
SMA MALE	50 OHM
PE-T195	50 OHM

Standard Lengths	
-12	12"
-24	24"
-36	36"
-48	48"
-60	60"
-XXX	Custom Length in inches

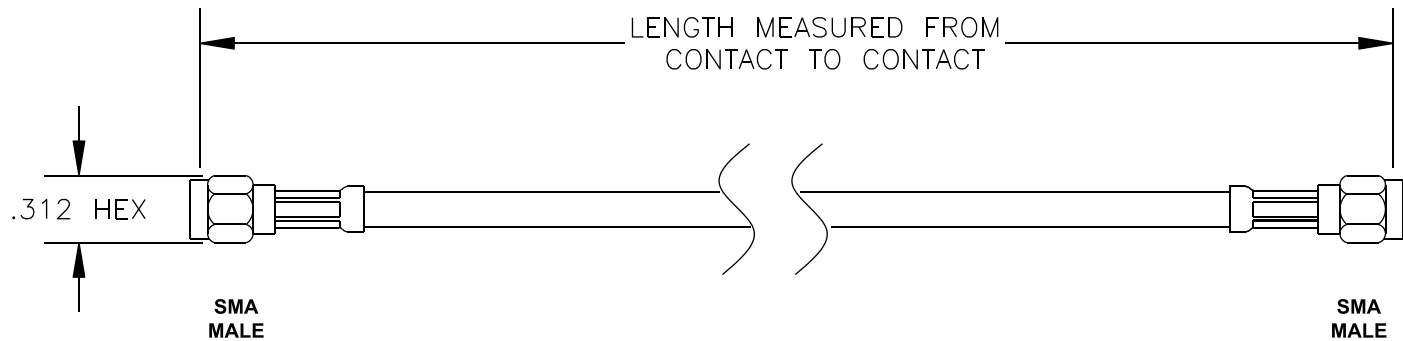

PE-T195 PERFORMANCE

IMPEDANCE: 50 OHMS
 NUMBER OF SHIELDS: 2
 OUTER DIAMETER: .195"
 JACKET MATERIAL: BLACK POLYETHYLENE
 NOMINAL CAPACITANCE (pf/ft): 24.3
 OPERATING TEMPERATURE: -40° TO +85° C
 MAX OPERATING VOLTAGE (VOLTS RMS): 1,000

NOMINAL ATTENUATION (PER 100 FEET)

50 MHz	2.6 dB
150 MHz	4.4 dB
1.5 GHz	14.5 dB
2.5 GHz	19.0 dB

MAXIMUM POWER HANDLING (AVERAGE POWER IN WATTS)

50 MHz	680
150 MHz	390
1.5 GHz	120
2.5 GHz	90

* PE-T Series is a functionally equivalent to Times Microwave LMR[®] series
 ** LMR[®] is a registered trademark of Times Microwave



PASTERNAK ENTERPRISES, INC.
 P.O BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451
 WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

DWG TITLE		DES.	
PE35784-XX		CABLE ASSEMBLY, PE-T195, SMA MALE TO SMA MALE	
REV. -	FSCM NO. 53919	CAD FILE	122908
		SCALE	N/A
		SIZE	A 127

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES.
 4. LENGTH TOLERANCE IS ± 1.5% OR 10mm, WHICHEVER IS GREATER.