

SMA FEMALE ISOLATOR 17.3-22GHZ

SFI1822

SPECIFICATIONS

ELECTRICAL


FREQUENCY: 17.3-22 GHz
IMPEDANCE: 50 OHMS
INSERTION LOSS: 0.50 dB MAX
VSWR: 1.25:1 MAX
POWER (AVG): 10W
REFLECTIVE POWER (TERM): 2W
PEAK POWER: 30W
ISOLATION: 20 dB MIN

MECHANICAL


CONNECTORS: SMA-F; PASS. STAINLESS STEEL
CONTACT PINS: BeCu, Au PLATED

OPERATING TEMPERATURE: -20°C TO +65°C

ROHS COMPLIANT

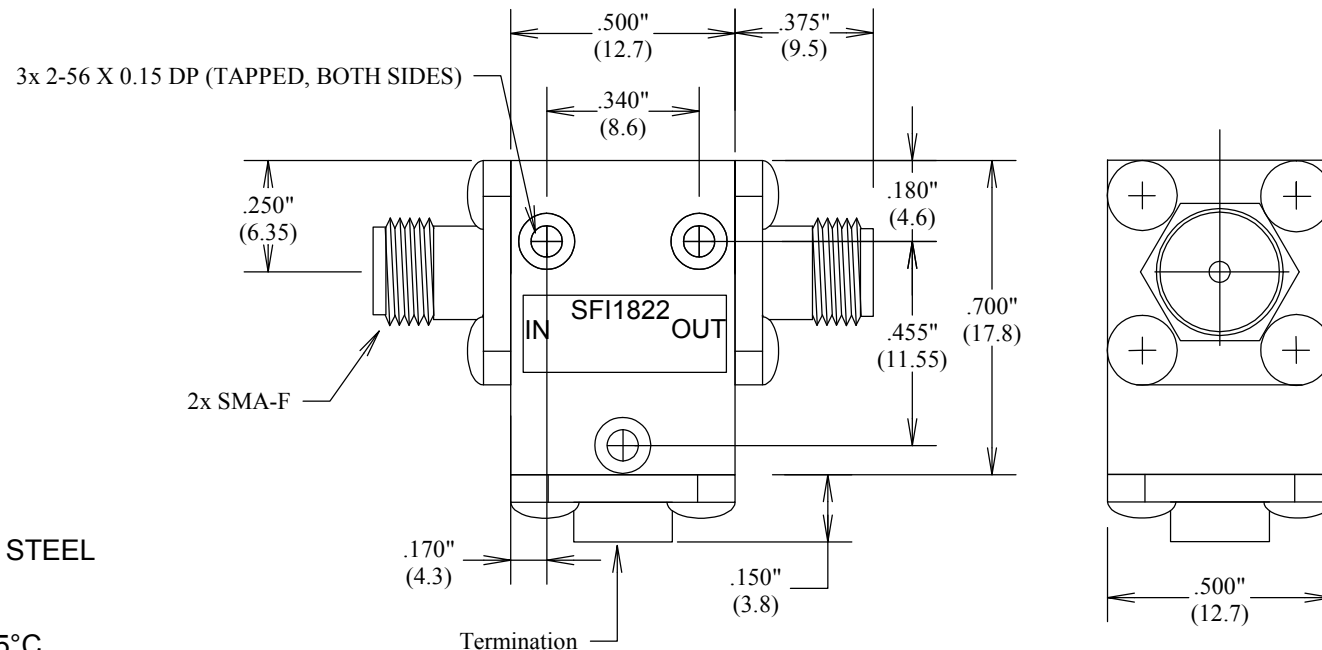

MEASUREMENTS BELOW ARE TYPICAL

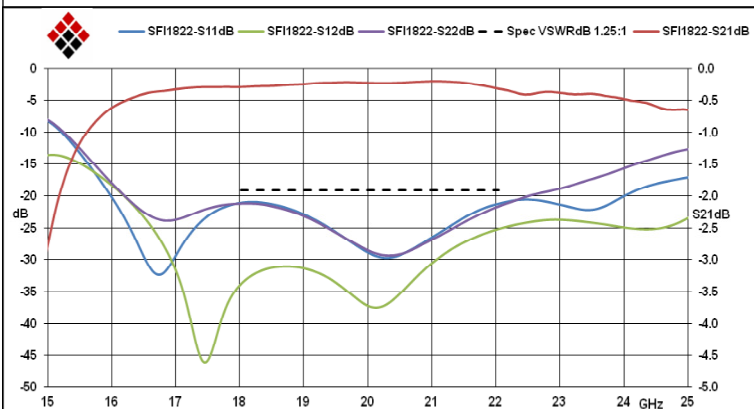

ALL DIMENSIONS IN inches(mm) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

SMA FEMALE ISOLATOR 17.3-22GHZ

SIZE

A

CAGE CODE

3FKR5

DWG NO

SFI1822

REV

--

SCALE

SHEET