

SMP PCB BOARD R/A LIMITED DETENTE

SC5346

SPECIFICATIONS:

ELECTRICAL:


FREQUENCY: 0-18 GHZ
IMPEDANCE: 50 OHMS
VSWR: 1.3:1 MAX
OP. TEMP RANGE: -55°C- +120°C

MECHANICAL:



MATERIAL BODY: BRASS
CENTER CONTACT: BRASS
PLATING: Au 50μ-in
INSULATOR: TEFLON
INTERFACE: DESC 94007

SMOOTH BORE
FORCE TO ENGAGE: 2.0 LBS MAX
FORCE TO DISENGAGE: 0.5 LBS MIN

ROHS COMPLIANT

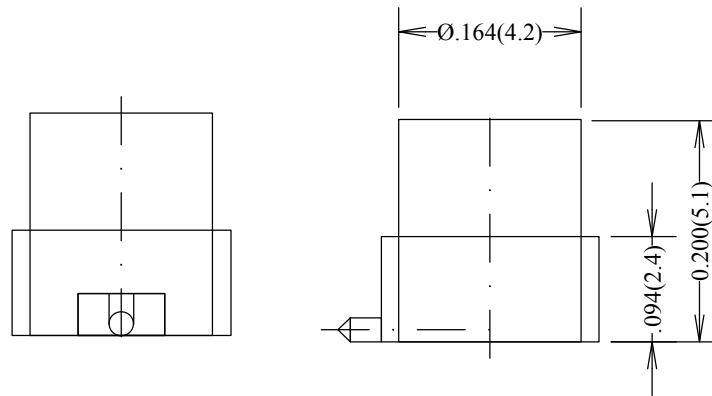

4 STAMPING

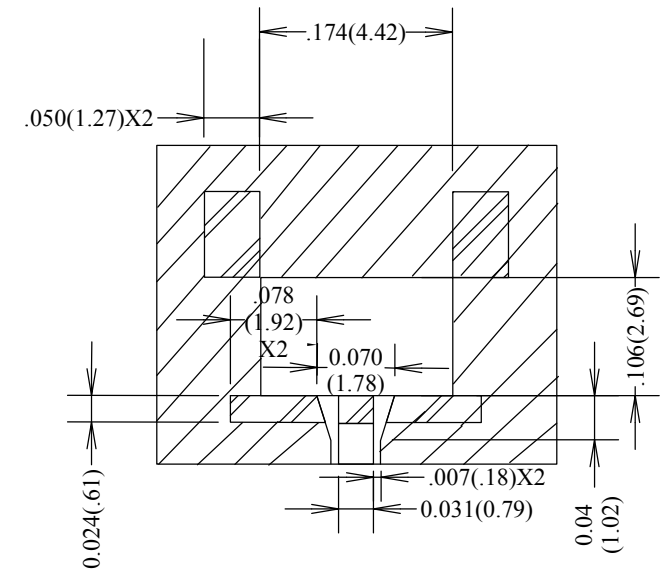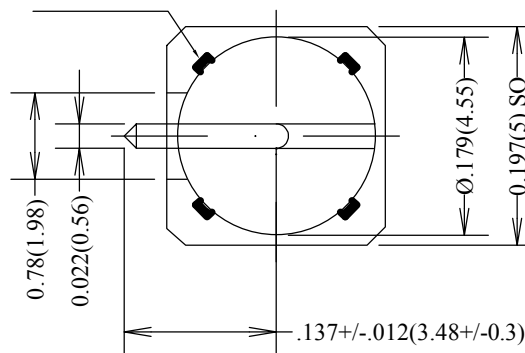

RECOMMENDED PCB PATTERN

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

SMP PCB BOARD R/A LIMITED DETENTE

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SC5346	--
SCALE	SHEET		

ALL DIMENSIONS IN inches(mm) Typical