

390 to 397MHz – Band Pass Filter

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF10673B390T397NF	390 ~ 397	2.0	1.2	60dB @88~108MHz 40dB @ Fc ±6.5MHz	100	N-F	-40 ~ +85
UIYBPF10673B390T397SF	390 ~ 397	2.0	1.2	60dB @88~108MHz 40dB @ Fc ±6.5MHz	100	SMA-F	-40 ~ +85

² Listed are specific frequency ranges and other ranges are available.


² Please provide the below informations when inquiring and mark * is required.

* 1. The specific pass band frequency range

* 2. The specific rejection and frequency

3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

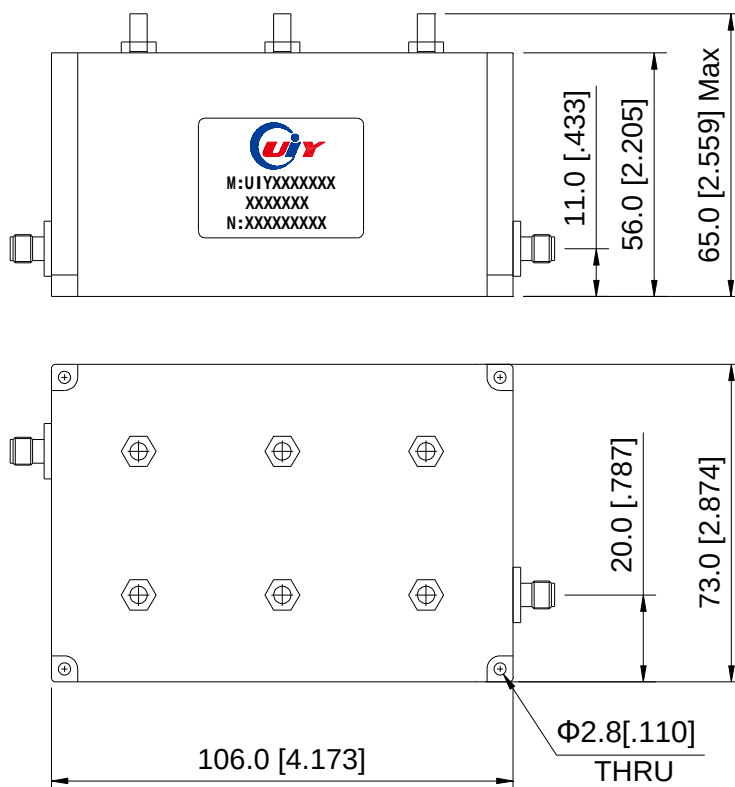

Unit: mm/ inch, General part tolerance is ± 0.2 mm unless otherwise stated.

Ver. 5

A2-5G, Zhujiang Plaza, Longxiang Blvd, Longgang District, Shenzhen 518172, China.

Tel: +86-755-25999990 25999909 Fax: +86-755-25999959 E-mail: sales@uiy.com Web: www.uiy.com