


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

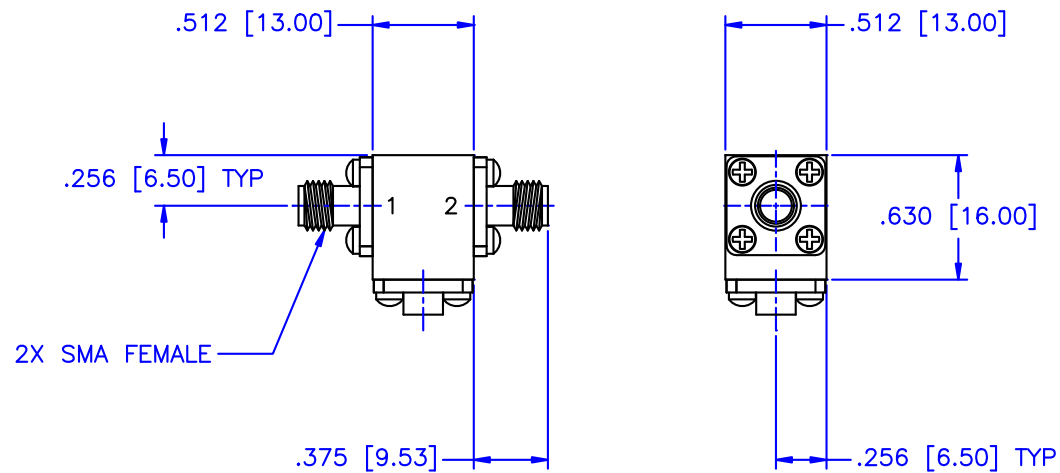

SPECIFICATIONS:


Frequency Range: 9–10 GHz

Isolation: 20dB Min.

Insertion loss: 0.5dB Max.

VSWR: 1.25:1 Max.

Operating Temperature: –54°C to +85°C

MATERIAL:		 MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344–6254 FAX: (727) 381–6116 http://WWW.MCLI.COM	SCALE:		N/A
			SHEET:		N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.010 ANGLE: ±1/2°		DRAWING TITLE:			
		COAXIAL ISOLATOR			
DRAWN: Paiboon Luekhamhan DATE: 08–17–2011		PART NO.			
		IS–148			
APPROVED: T. Nguyen DATE: 08–17–2011		CAGE CODE:		SIZE:	REV:
		OD2L5		A	N/A
		THIRD ANGLE PROJECTION		DWG NO.	
				85836	
		DO NOT SCALE THE DRAWING			