


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

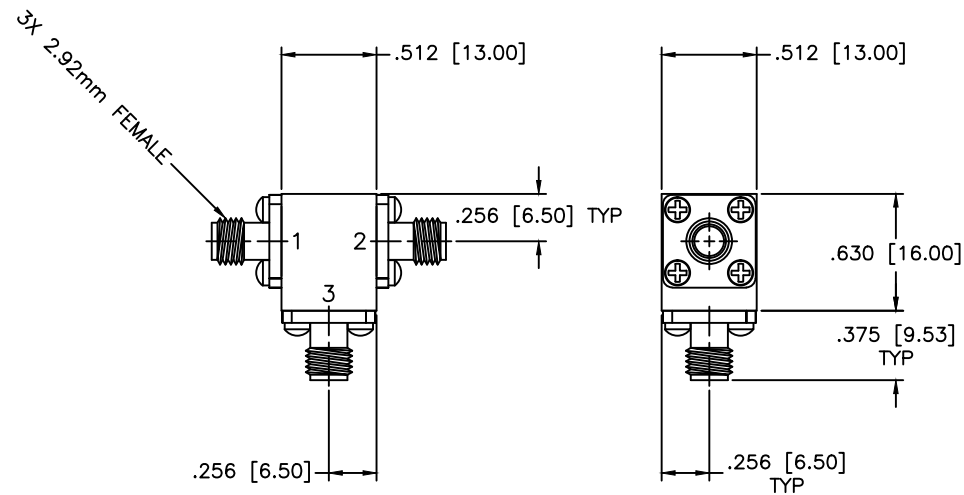

SPECIFICATIONS

Frequency Range: 25–27 GHz
 Isolation: 20dB Min.
 Insertion loss: 1.0dB Max.
 VSWR: 1.35:1 Max.
 Circulator Power: 25W Avg.
 Operating Temperature: –10°C to +60°C

MATERIAL:		 MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
				SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:			
		COAXIAL CIRCULATOR			
DRAWN: Paiboon Luekhamhan		DATE: 03-01-2010		PART NO. CS-123	
APPROVED: T. Nguyen		DATE: 03-01-2010		CAGE CODE: OD2L5	SIZE: A REV: N/A DO NOT SCALE THE DRAWING
		THIRD ANGLE PROJECTION		DWG NO. 84727	