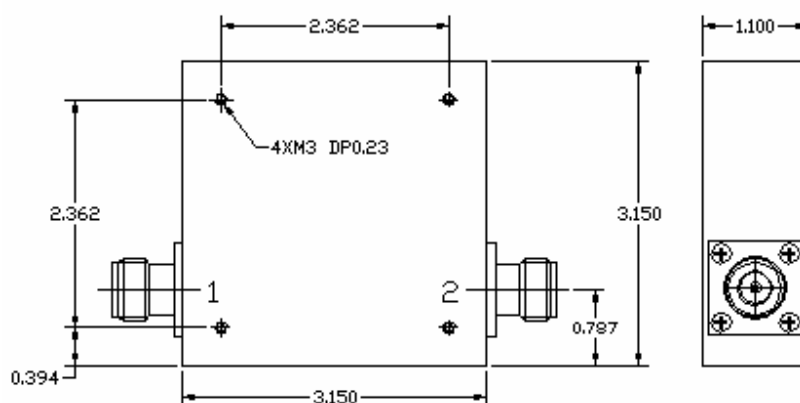


**Key Features:**

- Wide frequency range: 1000-2000MHz partial or full band
- 50 ohm N-type or SMA coaxial connectors
- Small size, low cost
- Power handling +50 Watts forward, +10 Watts reverse
- Operating temperature 0~+45°C

**Electrical Specifications**

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Reverse Power, Watts	Temp. Range, °C
F2072-0150-67	1.00-2.00	1.0 Max	≥ 15	≤ 1.5	≥ 50	>10	0 ~ +45

**Mechanical Structure:**

Note: All units in inches.

**Ordering Information:**

F2072-XXXX-XX  
                  ↓                  ↓  
                  Bandwidth, XX%,  
                  ↓  
                  Frequency XX.XX GHz,