




This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖、销售及采购。

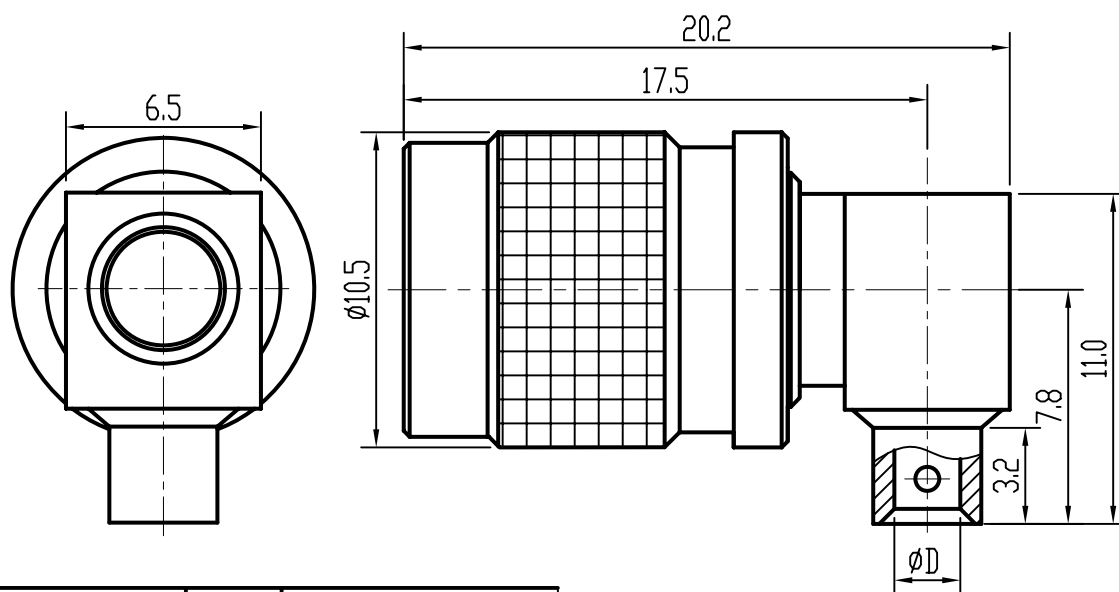

产品型号	ϕD	配接电缆 (cable)
CQA-JWB2	2.2	SFT-50-2-1 RG405/U
CQA-JWB3	3.6	SFT-50-3-1 RG402/U

Electrical Characteristics

- Characteristic Impedance: $50\ \Omega$
- Frequency range: DC~18.0GHz
- Contact resistance
Center conductor: $\leq 3.0\ m\Omega$
Out conductor: $\leq 2.0\ m\Omega$
- Insulation resistance: $\geq 5000M\ \Omega$
- Insulator withstanding: 1000V
- Durability: 200cycles

Application: MIL-C-39012/55D

Material&Finishing

- Center contact :
Brass, gold plated
- Body: brass, nickel plated
- Insulators: PTFE
- contact piece:
Beryllium copper, gold plated

主要性能指标

- 特性阻抗: $50\ \Omega$
- 频率范围: DC~18.0GHz
- 接触电阻:
中心导体: $\leq 3.0\ m\Omega$
外导体: $\leq 2.0\ m\Omega$
- 绝缘电阻: $\geq 5000M\ \Omega$
- 介质耐压: 1000V
- 插拔次数: 200次

执行标准: MIL-C-39012/55D

材料和镀层

- 中心接触件:
黄铜, 镀金
- 壳体: 黄铜, 镀镍
- 绝缘子: 聚四氟乙烯
- 接触头: 铍青铜, 镀镍

		SCALE	RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X $\pm$.15 $\pm 1^\circ$.XX $\pm$.05 .XXX $\pm$
		5:1		
NAME	DATE			
DRAWN				
CHECKED				
APPROVED			西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.	