



MECHANICAL CHARACTERISTICS	
INTERFACE	MIL-STD-348, FIGURE 304-2
IN ACCORDANCE WITH THE INTENT OF SLANT SHEET	MIL-PRF-39012/3 REF.
RECOMMENDED MATING TORQUE	20 IN-LBS. NOM.
FORCE TO ENGAGE	6 IN-LBS. MAX.
FORCE TO DISENGAGE	6 IN-LBS. MIN.
CONTACT CAPTIVATION (BOTH DIRECTIONS)	6 LBS. MIN.
DURABILITY	500 CYCLES MIN.
CENTER CONTACT INSERTION FORCE (INTERFACE)	2 LBS. MAX.
CENTER CONTACT WITHDRAW FORCE (INTERFACE)	2 OZ. MIN.
CABLE RETENTION	20 LBS. MIN.
MASS	39.30 GRAMS NOM.
RECOMMENDED JAM NUT TORQUE	40-45 IN-LBS.
ELECTRICAL CHARACTERISTICS	
IMPEDANCE	50 Ohms NOM.
MAXIMUM FREQUENCY	18 GHz
VSWR DC - 18 GHz	1.16:1MAX.
INSERTION LOSS	0.045 $\sqrt{f}$ (GHz) dB MAX.
DIELECTRIC WITHSTANDING VOLTAGE	925 Vrms MIN.
INSULATION RESISTANCE	5000 MegaOhms MIN.
RF LEAKAGE DC - 18 GHz	-90 dB MIN.
CORONA	240 Vrms MIN. @ 70,000 FEET
RF HIGH POTENTIAL	600 Vrms MIN.
CONTACT RESISTANCE (INNER)	1.0 MilliOhms MAX.
CONTACT RESISTANCE (OUTER)	0.2 MilliOhms MAX.
ENVIRONMENTAL CHARACTERISTICS	
OPERATING TEMPERATURE	-55°C TO 150°C
VIBRATION	MIL-STD-202, METHOD 204, CONDITION B
MECHANICAL SHOCK	MIL-STD-202, METHOD 213, CONDITION I
THERMAL SHOCK	MIL-STD-202, METHOD 107, CONDITION B
MOISTURE RESISTANCE	MIL-STD-202, METHOD 106, CONDITION (NO VIBRATION)
CORROSION	MIL-STD-202, METHOD 101, CONDITION B, 5%
MATERIALS AND FINISH	
CONTACT	BERYLLIUM COPPER PER ASTM-B-196, GOLD PLATE PER MIL-DTL- 45204, OVER NICKEL PLATE PER AMS-QQ-N-290.
BODY, CLAMP NUT, SLEEVE, & LOCKNUT	STEEL, CORROSION RESISTANT, PER ASTM-A-582, UNS NO. S30300, PASSIVATE PER ASTM-A-967
CONTACT RING	BRASS, PER ASTM-B-16, GOLD PLATE PER MIL-DTL-45204, OVER NICKEL PLATE PER AMS-QQ-N-290
DIELECTRIC BEAD & DIELECTRIC STOP	POLYPHENYLENE SULFIDE (PPS), PER ASTM-D-6358
GASKET	SILICONE RUBBER PER ZZ-R-765
LOCKWASHER	302 STAINLESS STEEL, PASSIVATE PER ASTM-A-967
APPLICATION	
CABLE(S)	147A SERIES CABLE
INSTALLATION	PER CONFIGURATOR

THIS DRAWING IS PROPRIETARY AND CONFIDENTIAL.

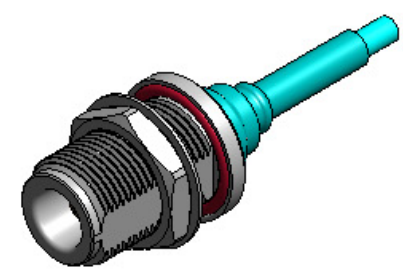

ISOMETRIC VIEW
SCALE 1:1

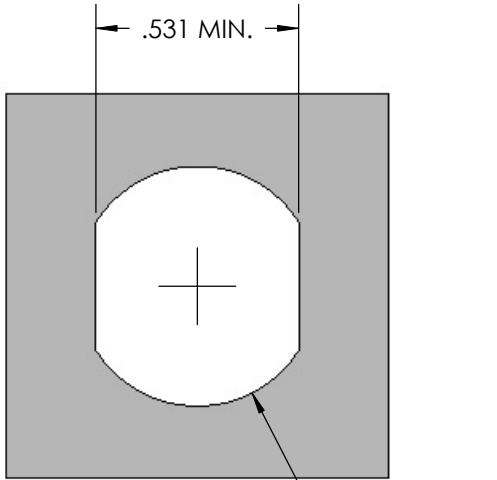


RECOMMENDED
MOUNTING HOLE

NOTE:

1. MARKER LOCATION ON THIS DRAWING IS FOR REFERENCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

REV.	DESCRIPTION	DATE	BY	APPVD
A	INITIAL RELEASE	06/09/05	SRS	RS
B	ECO 65409	9/15/2006	JMK	RS
C	ECO 135241	5/1/2013	MJM	RS

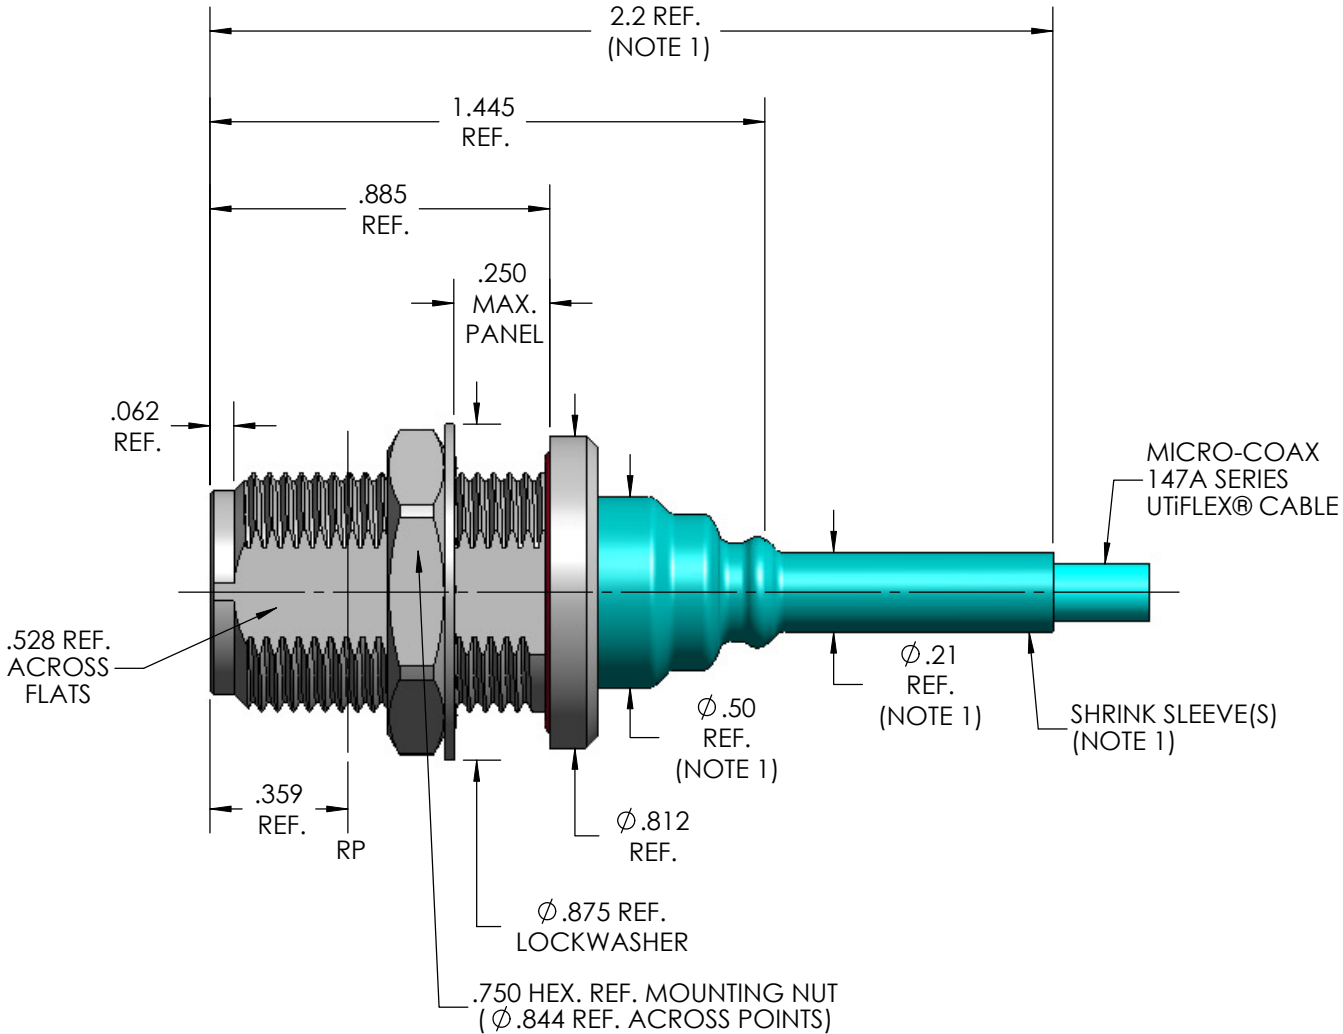

SPECIFICATION DRAWING

THIS SPECIFICATION IS THE PROPERTY OF MICRO-COAX, INC. AND MAY NOT BE USED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRO-COAX, INC.		INITIALS		DATE		MICRO-COAX[®] Leading the way in transmission line solutions. Copyright Micro-Coax, Inc.									
		DWN.	SRS	12/21/04											
		CHKD.	MJM	5/2/13											
		APPVD.													
TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE								PRECISION N BULKHEAD JACK, 147A SERIES CABLE					
.XX	± .02	ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. SCREW THDS. TO BE IN ACCORD WITH ANSI B1.1-1989.						FSCM NO.	SIZE			SCALE	SHEET NO.	DRAWING NO.	REV
.XXX	± .005														
.XXXX	± .0010														
ANGLES	± 2°														
								64639	B	2:1	1 OF 1	SD904227	C		