



## SMA Male Connector Solder Attachment For RG188-DS, RG316-DS

### TECHNICAL DATA SHEET

PE4402

#### SMA Male Connector Solder Attachment For RG188-DS, RG316-DS

##### Configuration

Connector	SMA Male
Connector Specification	MIL-STD-348A
Connector Interface Type	RG188-DS, RG316-DS
Cable Attachment Method (Shield/Contact)	Solder/Solder
Body Style	Straight

##### Electrical Specifications

Frequency Range, GHz	DC to 12.4
Impedance, Ohms	50
Maximum Operating Voltage, Volts	335

##### Frequency 1

Frequency, GHz	DC to 3
VSWR	1.21:1

##### Mechanical Specifications

###### Temperature

Operating Range, deg C	-40 to +85
------------------------	------------

###### Size

Length, in [mm]	0.87 [22.1]
Width/Dia., in [mm]	0.313 [7.95]
Weight, lbs [g]	0.006 [2.72]

###### Connector

Type	SMA Male
Contact Material and Plating	Brass, Gold
Contact Plating Specification	30μ in. minimum
Coupling Nut Material and Plating	Brass, Nickel
Coupling Nut Plating Specification	100μ in. minimum
Hex Size, in.	5/16
Torque, in-lbs [Nm]	5 [0.57]
Body Material and Plating	Brass, Nickel
Body Plating Specification	100μ in. minimum
Dielectric Type	Teflon

##### Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Connector Solder Attachment For RG188-DS, RG316-DS PE4402](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



## SMA Male Connector Solder Attachment For RG188-DS, RG316-DS

### TECHNICAL DATA SHEET

PE4402

#### Plotted and Other Data

Notes:

Values at 25 °C, sea level

SMA Male Connector Solder Attachment For RG188-DS, RG316-DS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Connector Solder Attachment For RG188-DS, RG316-DS PE4402](http://www.pasternack.com/sma-male-standard-rg188-ds-rg316-ds-connector-pe4402-p.aspx)

URL: <http://www.pasternack.com/sma-male-standard-rg188-ds-rg316-ds-connector-pe4402-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

# PE4402 CAD Drawing

SMA Male Connector Solder Attachment For RG188-DS, RG316-DS

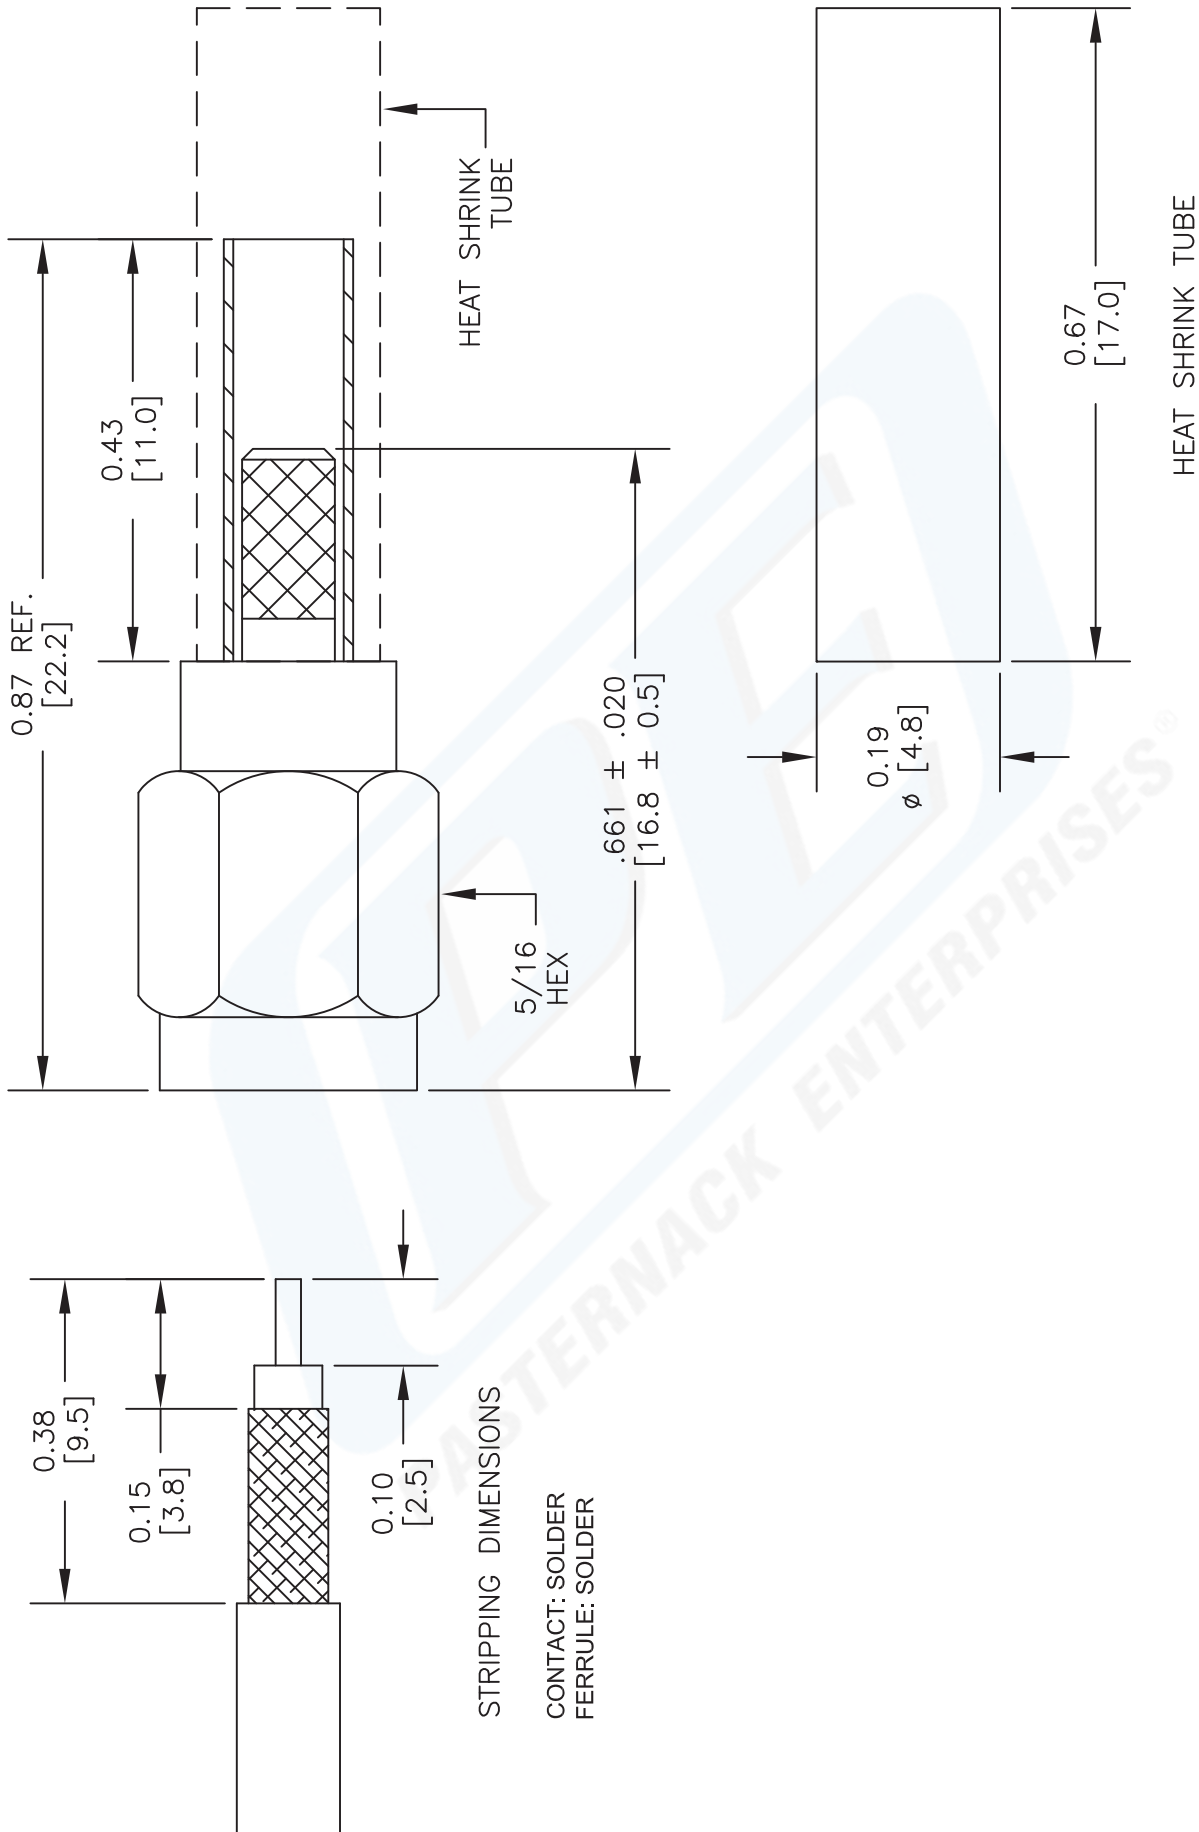

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  3. DIMENSIONS ARE IN INCHES [mm].
  4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE

**PE4402**

FSCM NO. 53919

2233

SIZE A

SCALE N/A

CAD FILE 100512-C

**PE PASTERNAK®**

Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com