

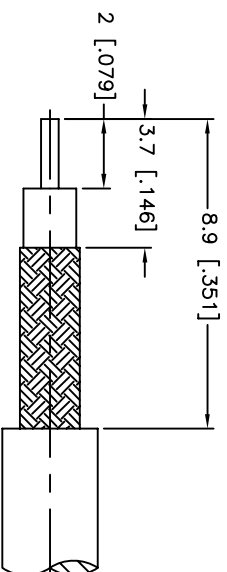



REV.	DATE	ECR NO.	DESCRIPTION
NC	04/21/09	XXXXXX	INITIAL RELEASE

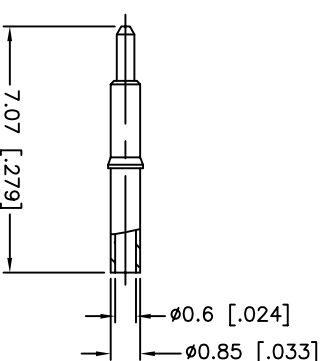

RECOMMENDED CABLE STRIPPING DIM'S

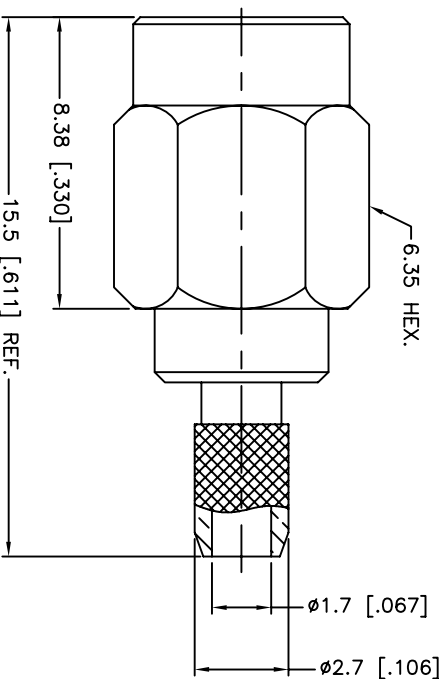

NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

7	FERRULE	BRASS	GOLD	1
6	CONTACT PIN	BRASS	GOLD	1
5	GASKET	SILICONE	RED	1
4	RETAINER RING	BER. COPPER	NATURAL	1
3	INSULATOR	PTFE	NATURAL	1
2	OUT CONTACT	BRASS	GOLD	1
1	SHELL	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

Amphenol Connex

SSMA CRIMP PLUG
(FOR RG-174/U, 188A/U, 316/U)

PART NO	
---------	--

133101

CAD FILE
C:/CONNEX/133101.DWG

	DWG. NO
--	---------

133101N.DWG

REV. NO.

SIZE	A
------	---

SCALE	NA
-------	----