


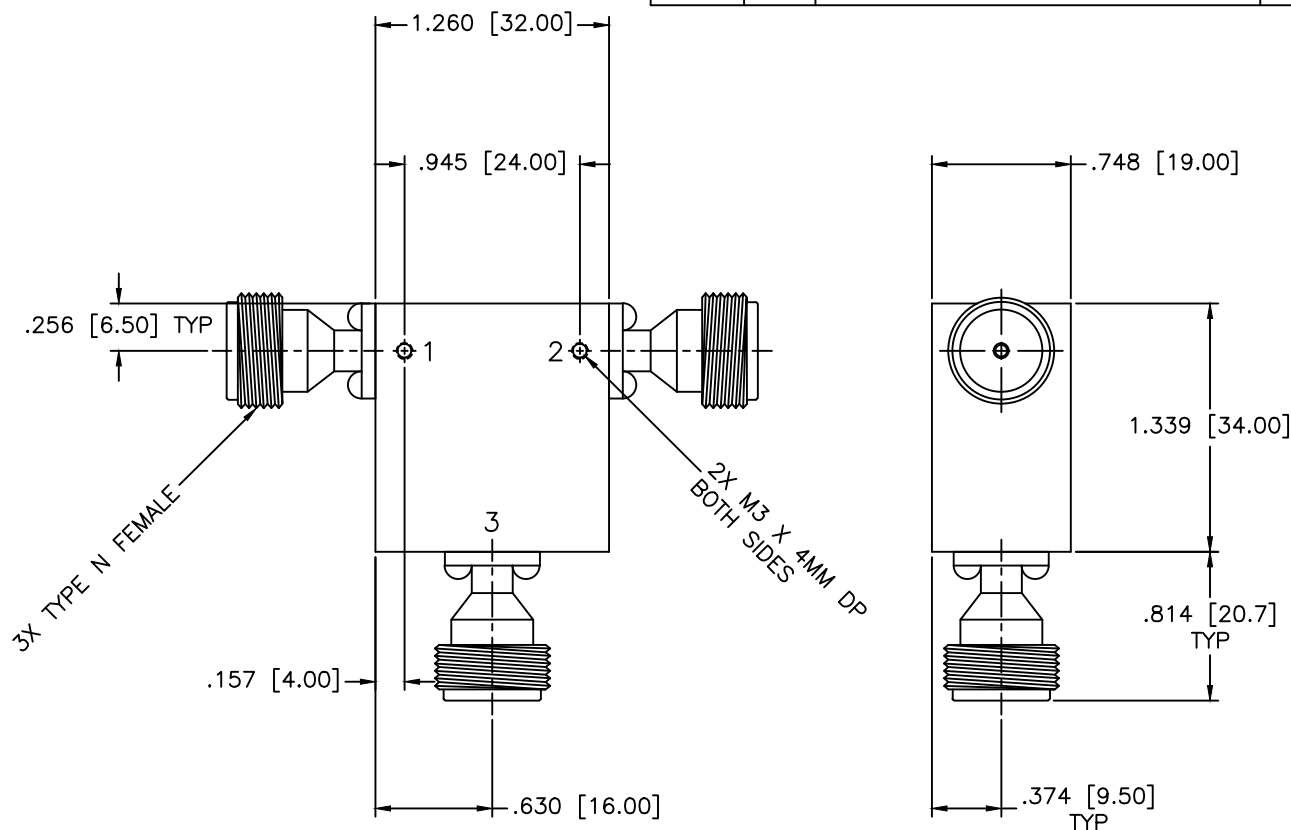

SPECIFICATIONS

Frequency Range: 1.03–1.09 GHz
 Operating Temperature: 0°C to +70°C
 Isolation: 20dB Min.
 Insertion loss: 0.40dB Max.
 VSWR: 1.25:1 Max.
 Power: 50W Avg, 2kW Peak

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com		SCALE: N/A	
				SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: COAXIAL CIRCULATOR			
		PART NO. CS-75/NF			
DRAWN: Paiboon Luekhamhan DATE: 06-29-2010		CAGE CODE: 0D2L5		SIZE: A	REV: N/A
APPROVED: T. Nguyen DATE: 06-29-2010		DWG NO. 84979		DO NOT SCALE THE DRAWING	