

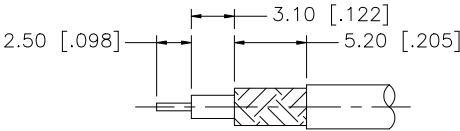




REV.	DATE	ECR NO.	DESCRIPTION
NC	12/09/08	-	INITIAL RELEASE

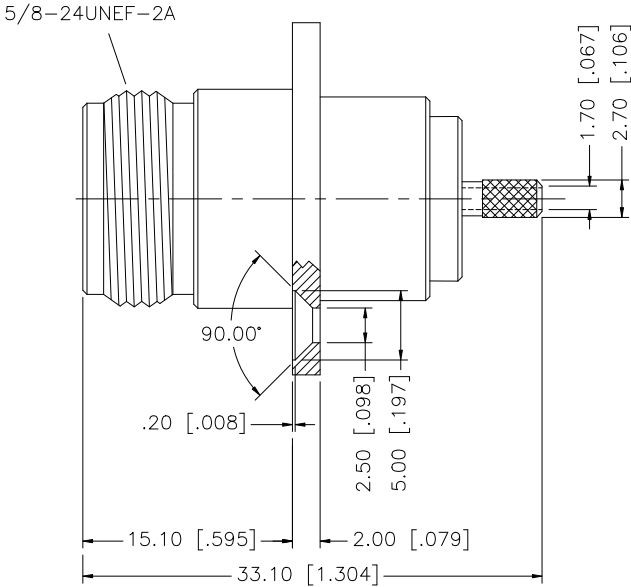

RECOMMENDED CABLE
STRIPPING DIMENSIONS

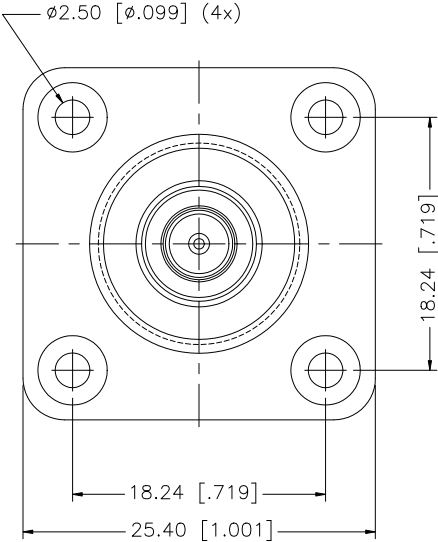

- NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .128" [3.25]
 2. CRIMPED CONTACT PIN TO SOLDER

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex					
7						DRAWN	GRS	12/09/08							
6						CHECKED				PART DESCRIPTION N PANEL CRIMP JACK – COUNTER SUNK FLANGE (FOR RG-174/U, 188A/U, 316/U CABLE)					
5						ISSUED									
4	FERRULE	COPPER	NICKEL	1		SHEET	1 OF 1				PART NO. 172173-11				
3	CONTACT PIN	BRASS	GOLD	1											
2	INSULATOR	PTFE	NATURAL	1						DWG. NO. 172173-11.DWG					
1	BODY W/PANEL	BRASS	NICKEL	1											
	DESCRIPTION	MATERIAL	FINISH	QTY				CAD FILE C:/172/172173-11.DWG		REV.	NC	SIZE	A	SCALE	NA