


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

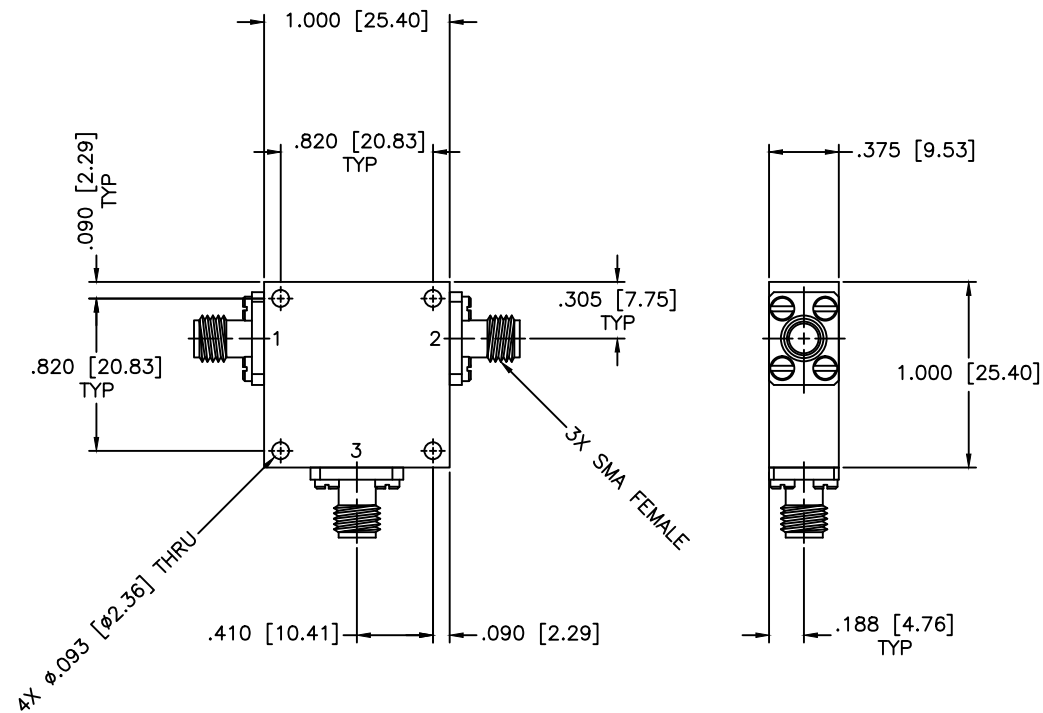

SPECIFICATIONS

Frequency Range: 0.89–0.91 GHz
 Isolation: 20dB Min.
 Insertion loss: 0.35dB Max.
 VSWR: 1.22:1 Max.
 Power: 25W Avg, 250W Peak
 Operating Temperature: –54°C to +85°C

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: COAXIAL CIRCULATOR			
		PART NO. CS-32			
DRAWN: Palboon Luekhamhan DATE: 05-24-2010		DATE: 05-24-2010 PERMITTED BY NOTES: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE: OD2L5	SIZE: N/A
APPROVED: T. Nguyen		DATE: 05-24-2010 		REV: N/A	DWG NO. 84874
				DO NOT SCALE THE DRAWING	