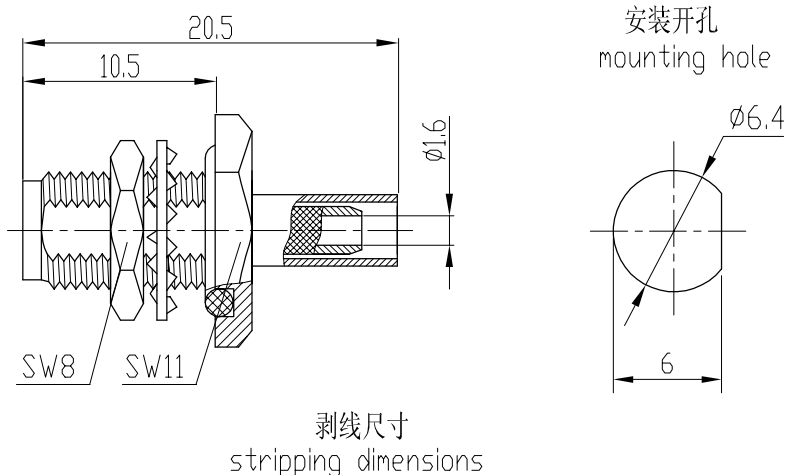


产品型号 type	电缆型号 type cable	备注 remark
SMA-KY3E	SFF-50-1.5-1、RG316/U	
SMA-KY3G		壳体、螺母: 不锈钢、镀金 body、nut: stainless steel, gold plated

Electrical Characteristics:

- Characteristic Impedance: 50 Ω
- Frequency range: DC~4Ghz
- Contact resistance
Center conductor: $\leq 3.0 \text{ m}\Omega$
Out conductor: $\leq 2.0 \text{ m}\Omega$
- Insulation resistance: $\geq 5000 \text{ M}\Omega$
- Insulator withstanding: 1000V
- VSWR: ≤ 1.4
- Durability: 500cycles

主要性能指标:

- 特性阻抗: 50 Ω
- 频率范围: DC~4Ghz
- 接触电阻:
中心导体: $\leq 3.0 \text{ m}\Omega$
外导体: $\leq 2.0 \text{ m}\Omega$
- 绝缘电阻: $\geq 5000 \text{ M}\Omega$
- 介质耐压: 1000V
- 电压驻波比: ≤ 1.4
- 插拔次数: 500次

Application: MIL-C-39012/55D

执行标准: MIL-C-39012/55D

Material&Finishing

- Center contact :
Female: beryllium, gold plated
- Body: brass, gold plated
- Crimp ferrule: copper, nickel plated
- Insulators: PTFE

材料和镀层

- 中心接触件:
插孔: 铍青铜, 镀金
- 壳体: 黄铜, 镀金
- 线夹: 黄铜, 镀镍
- 绝缘子: 聚四氟乙烯

				SCALE		SMA-KY3E	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
				2.5:1			
	NAME	DATE	西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.				
DRAWN							
CHECKED							
APPROVED							