


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

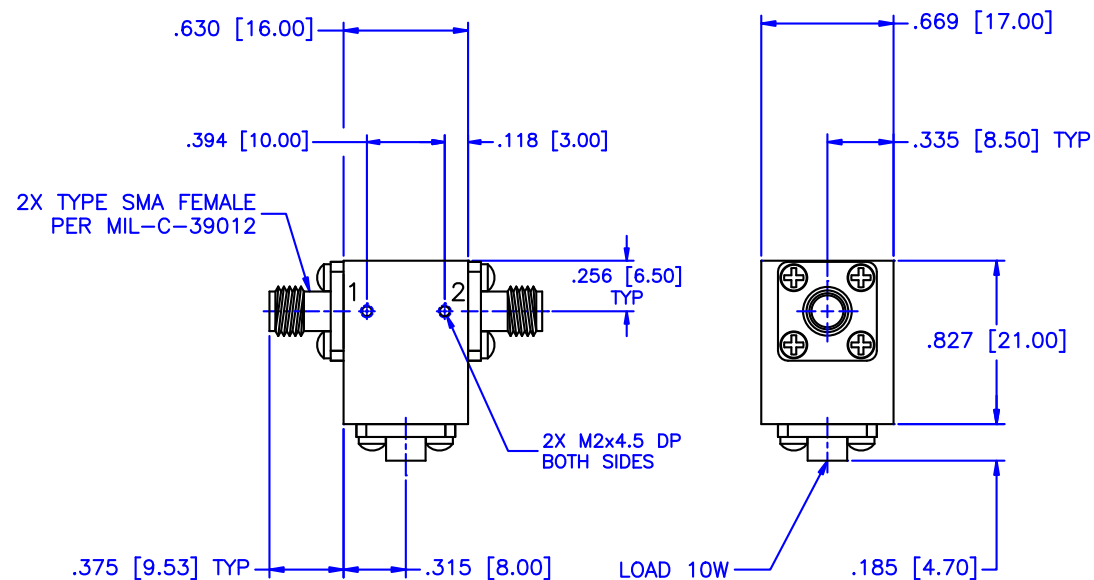

SPECIFICATIONS:

Frequency Range: 10–14 GHz
 Isolation: 23dB Min.
 Insertion loss: 0.35dB Max.
 VSWR: 1.15:1 Max.
 Operating Temperature: –54°C to +85°C
 Reverse Power: 10 Watts

MATERIAL: 				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: COAXIAL ISOLATOR		SHEET: N/A	
DRAWN: Paiboon Luekhamhan		DATE: 10-21-2010		PART NO. IS-132		CAGE CODE:	
APPROVED: T. Nguyen		DATE: 10-21-2010		DO NOT SCALE THE DRAWING		DWG NO. 85085	