

SMC PLUG RA RG174 RG188 RG316

SC8803

SPECIFICATIONS

ELECTRICAL
FREQUENCY: 0-10 GHZ
IMPEDANCE: 50 OHMS

MECHANICAL
MATERIAL BODY: BRASS, Au PLATED, 3μ" MIN
CONTACTS: BeCu
CONTACT PLATING: Au PER MIL-G-45204
INSULATOR: TEFLON


INTERFACE: MIL-STD-348A

OPERATING TEMPERATURE: -65°C TO 165°C


ROHS COMPLIANT

CRIMP SIZE REQUIRED: .138"(3.5) HEX CRIMP TOOL


CONNECTOR BODY

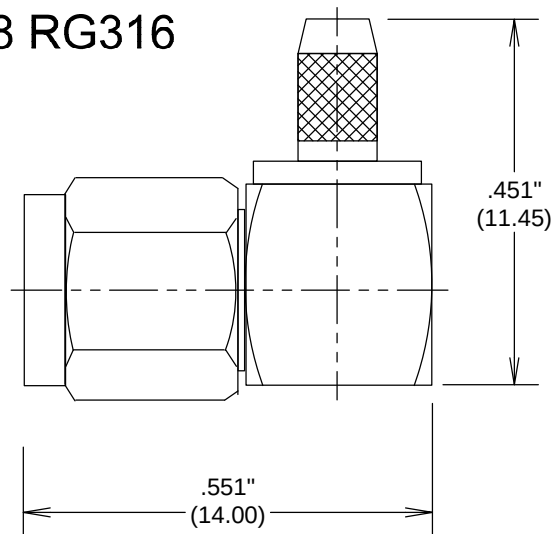


CAP



FERRULE

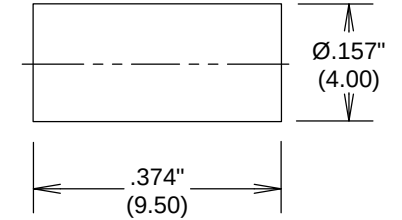

STRIPPING DIMENSIONS

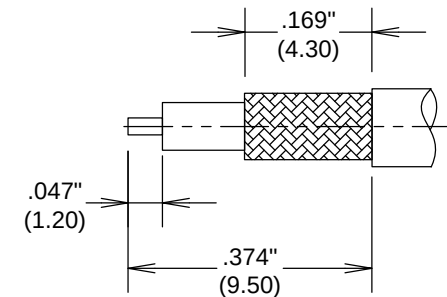

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

**SMC PLUG RIGHT ANGLE
RG174 RG188 RG316**

SIZE

A

CAGE CODE

3FKR5

DWG NO

SC8803

REV

--

ALL DIMENSIONS IN inches(MM) Typical

SCALE

SHEET