
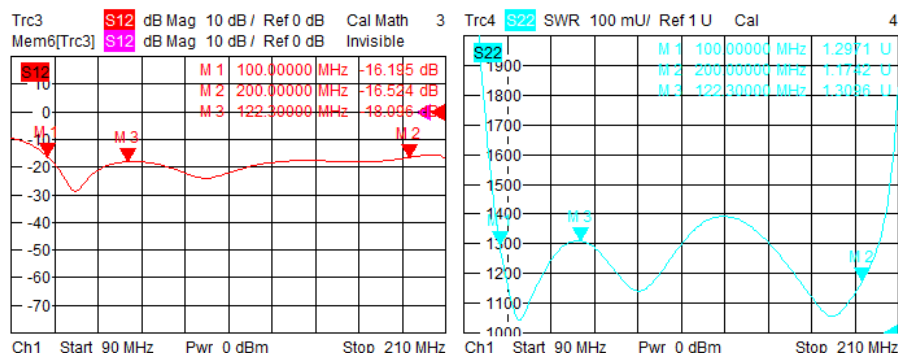



ULTRA WIDE BAND 100-200MHz CIRCULATOR -RFLC101M10M20

1.0	Mechanical Specifications	
1.1	Coaxial Connector	SMA-F or N-F
1.2	External Body Finish	Nickle Plated
1.3	Rotation	Clockwise / Counter-clockwise

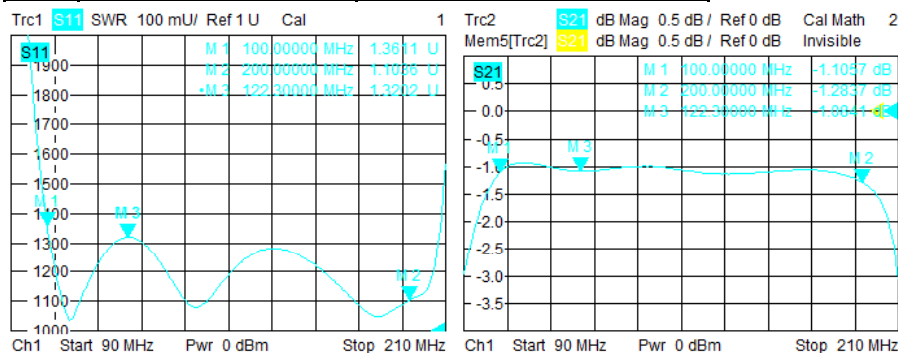

PN	Frequency (MHz)	Insertion loss (dB)	Isolation (dB) min	VSWR (max)	Forward Power (CW)	Reverse Power (CW)
RFLC101M10M20	100-200	1.2	16	1.5	100	N/A

* All spec. above in 25C degree only.

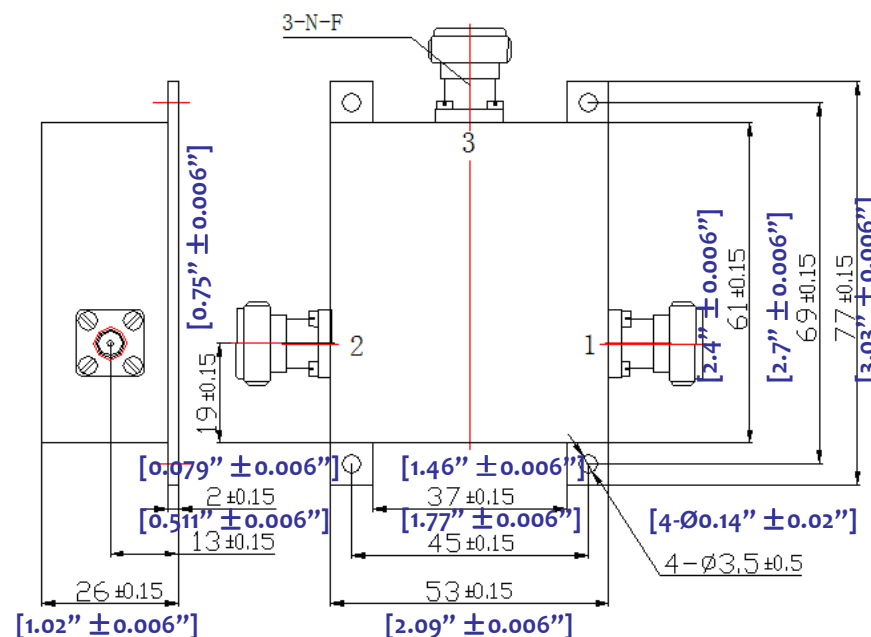

2.0	Environment specifications	
2.1	Opt. Temp.	-20°C~+70°C
2.2	Storage Temp.	-40°C~+85°C
2.3	Altitude	45000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc

PAGE 1 OF 1	DATE JAN 8 th 2003
DESIGN RFLC	RF-LAMBDA
RF-LAMBDA	RF-LAMBDA
CAD MODEL REVISION 02-1	ASSEMBLY REVISION VS23
ASSEMBLY NAME RFLVR54	DRAWING NUMBER D02-12
www.rflambda.com	RF-LAMBDA
SIZE LT	SHEETS 1 OF 1