



RF-LAMBDA

The power beyond expectations

5W MANUAL CONTROL CONTINUOUS VARIABLE ATTENUATORS (WR42 18-26.5GHz 35DB RANGE)

Product description

Broadband performance with compact package
Continuous variable attenuation during operation
Excellent Repeatability and Long Life Switch
Low Deviation from Nominal Value
50Ω impedance standard upon request
High power handle up to 5W CW
Custom Configurations Available Upon Request.



Applications:

Include Communication, 3G, Digital Transmission, Radar, Military, Broadcast & Television, science & Research etc.

Part Number	Center Frequency	Bandwidth	Power (Watts)	Attenuation Range (dB)	Flatness	VSWR max.	Insertion Loss (dB)
RWMAT42D35	18-26.5	Full	5	35dB	COVER 4 Holes Flat	1.20	<0.5


Connector: N type, weight: 2000g

Temperature

(Operational): -10° C~+50° C

(Storage) -40° C~+70° C

(Case temp) +85° C max. (FAN required)

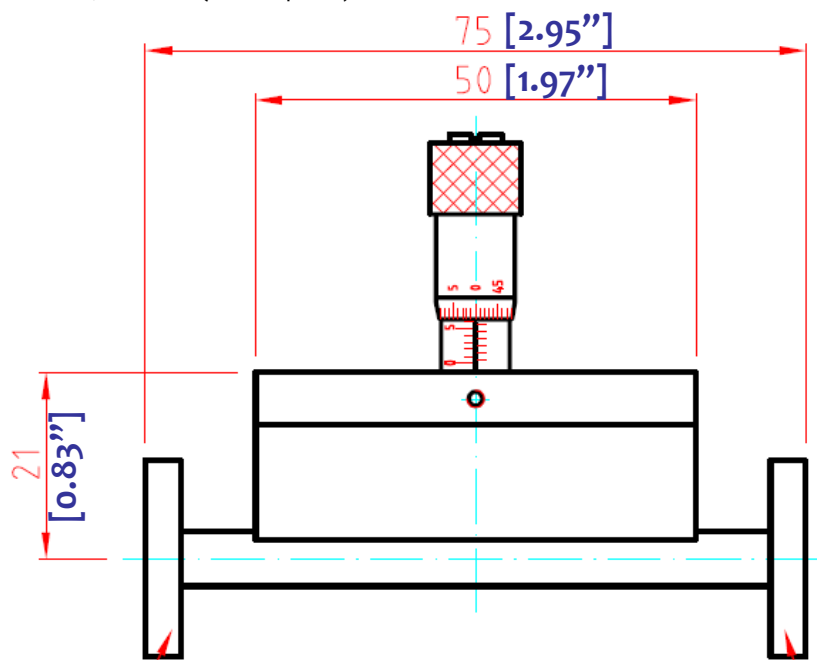


WR42 MANUAL CONTROL ATTENUATOR (18-26.5GHz 35dB)



RF-LAMBDA

The power beyond expectations

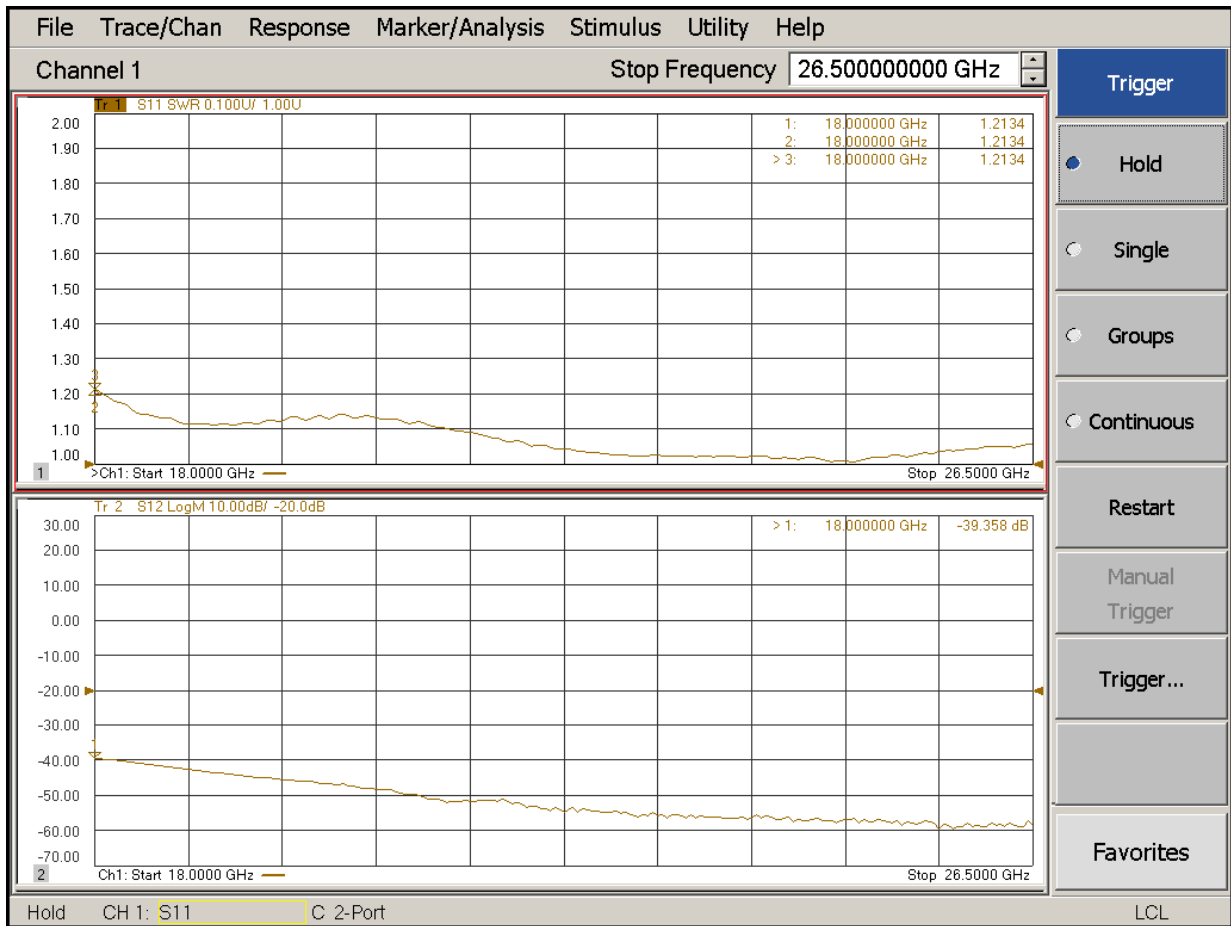

WR42 MANUAL CONTROL ATTENUATOR (18-26.5GHz 35dB)