

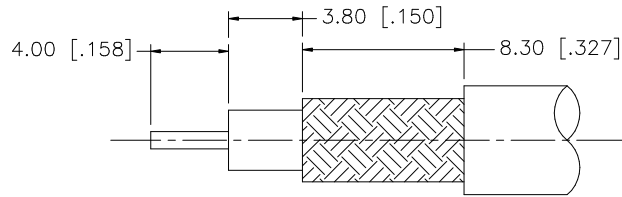
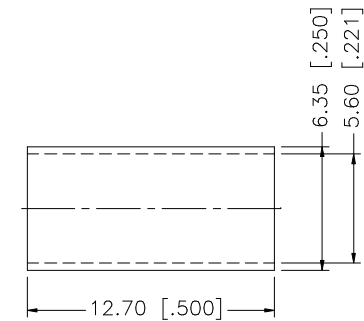


REV.	DATE	DESCRIPTION
A	04/05/03	UPDATE DRAWING FORMAT

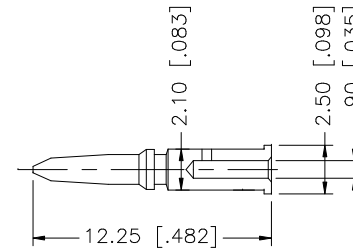

RECOMMENDED CABLE
STRIPPING DIM'S

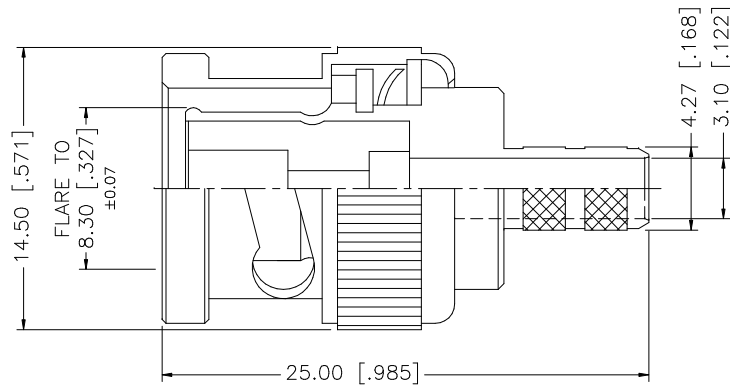

NOTE:

- 1.CRIMPED FERRULE
HEX CRIMP SIZE .213"
- 2.CRIMPED CONTACT PIN,
HEX CRIMP SIZE .068"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex							
8						DRAWN	G.R.S.						04/05/03		
7						CHECKED								PART DESCRIPTION	
6	FERRULE	COPPER	NICKEL	1						BNC CRIMP PLUG (FOR RG–55/U, 142A/U, 223/U, 400/U)					
5	GASKET	RUBBER	RED	1						PART NO.					
4	CONTACT PIN	BRASS	GOLD	1						112514					
3	INSULATOR	DELRIN	NATURAL	1											
2	BODY	BRASS	NICKEL	1											
1	SHELL	ZINC DIE CAST	NICKEL	1											
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE	C:/112/112514.DWG	DWG. NO.	112514.DWG	REV.	A	SIZE	A	SCALE	NA