


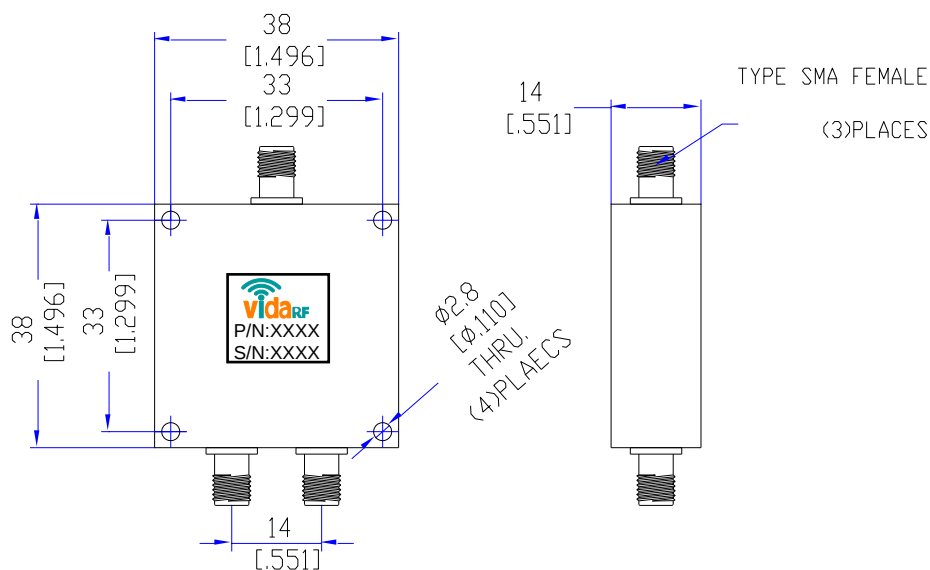


Electrical Specifications

Frequency Range	698~2700MHz
Insertion Loss	≤0.6dB
Isolation	≥20dB
VSWR	≤1.30:1
Amplitude Balance	≤±0.3dB
Phase Balance	≤±3°
Power Handling	Forward ≤30Watt; Reversed ≤1Watt
Impedance	50Ω
Port Connectors	SMA-Female
Surface Color	Silvery White

Environmental Parameters

Operating Temperature -40~+70℃

Operating Humidity Up to 90%,Non- Condensing

				Drawn: T. P 4/09/14	Title: 698-2700MHz 2 way divider					
				Checked: D. H 4/09/14						
Description	Ecn.No	Date	Rev	Approved: S. K 4/09/14						
 Tel:877-777-8432 www.vidaRF.com					Unless otherwise specified dimensions are in millimeters, dimensions in [] are in inches for customer reference only. Unless Otherwise Specified tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°		Cage Code		Part No: VPD-0627A2	
							6KQ83			
					View:				Size:	Scale:
				A4	4:1	1/1	A			