




This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖、销售及采购。

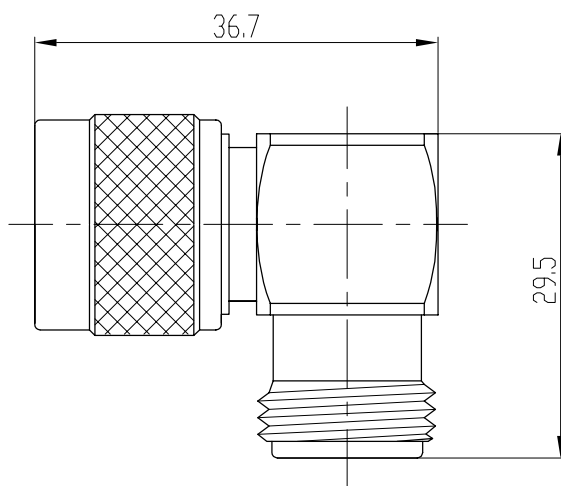

Electrical Characteristics:

1. Characteristic Impedance: 50Ω
2. Frequency range: DC~11Ghz
3. Contact resistance
Center conductor: $\leq 1.0\text{ m}\Omega$
Out conductor: $\leq 0.2\text{ m}\Omega$
4. Insulation resistance: $\geq 5000\text{ M}\Omega$
5. Insulator withstanding: 1500V
6. Durability: 500cycles

主要性能指标:

1. 特性阻抗: 50Ω
2. 频率范围: DC~11Ghz
3. 接触电阻:
中心导体: $\leq 1.0\text{ m}\Omega$
外导体: $\leq 0.2\text{ m}\Omega$
4. 绝缘电阻: $\geq 5000\text{ M}\Omega$
5. 介质耐压: 1500V
6. 插拔次数: 500次

Application: MIL-C-39012/1E

执行标准: MIL-C-39012/1E

Material & Finishing

1. Center contact:
brass, gold plated
2. Bodies and other metal parts:
brass, nickel plated
3. Insulators: PTFE
4. Gasket: silicone rubber

材料和镀层

1. 中心接触件:
黄铜, 镀金
2. 壳体和其它金属零件:
黄铜, 镀镍
3. 绝缘子: 聚四氟乙烯
4. 密封圈: 硅橡胶

				SCALE	N-JWK RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
				1.5:1		
NAME		DATE				
DRAWN						
CHECKED				西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO., LTD.		
APPROVED						