




Standards
NF C 96-315
MIL-DTL-39030

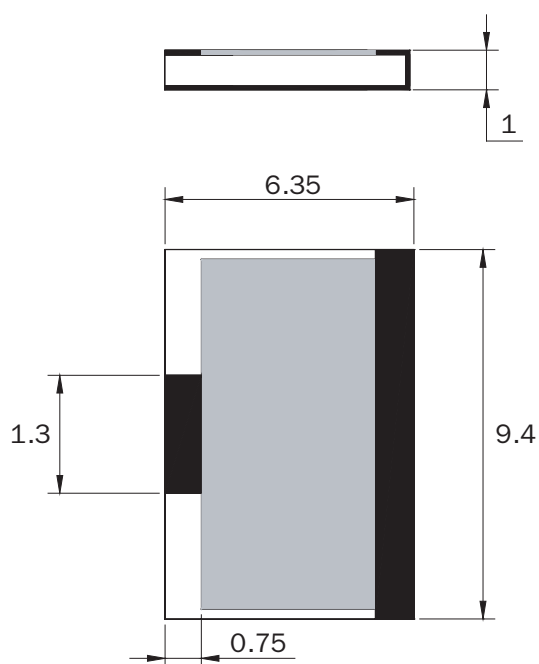

Substrate
Resistive film
Protection film
Contacts

BeO
Thick film
Epoxy
PtAg



Dimensions in mm

P/N	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR
40-0234	4	60	50	1.25

mm	inch
0.75	0.030
1	0.039
1.3	0.051
6.35	0.250
9.4	0.370



Available on Tap and Reel Packaging