


Uncontrolled Drawing

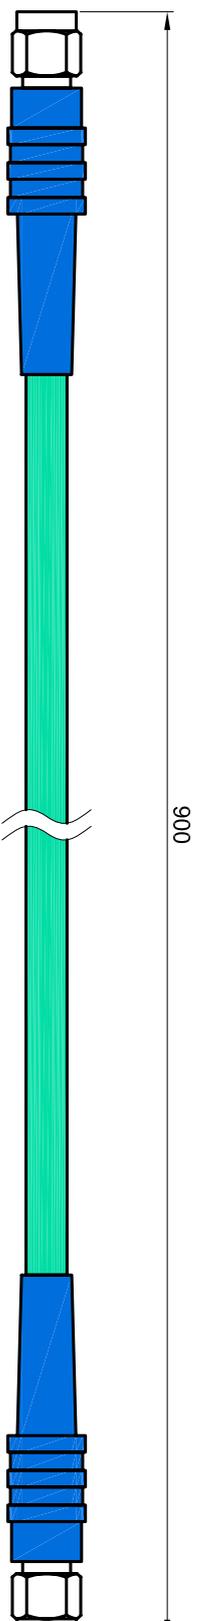

Type SMA male

Type SMA male

Specification:

1. Model: MC06-01-01-900
2. Nominal Impedance: 50Ω
3. Frequency Range: DC-6GHz, up to 8GHz
4. Insertion Loss: 0.80dB@DC-1GHz, 1.20dB@1-3GHz, 1.70dB@3-6GHz, 2.00dB@6-8GHz
5. VSWR: 1.15@DC-1GHz, 1.20@1-3GHz, 1.25@3-6GHz, 1.30@6-8GHz
6. Length: 0.9m
7. Connector: SMA male to SMA male
8. Power CW: 166W@6GHz

参量/项目	数量	规格/名称、型号、材料标准等	文件名称	图号	版本
设计	DESIGNED	设计人: ZYY, SHJ	FILENAME	日期	比例
校对	CHECKED	校对: ZH		10/12/13	1:1
审核 - 日期	APPROVED		Test Cable Assembly		
BXT Technologies		MC06-01-01-900			
Tel:0591-83789500		版本			
www.bxt-technologies.cn		EDITION			
		SHEET			

BXT
RF Technologies

BXT Technologies

Tel:0591-83789500

www.bxt-technologies.cn

Test Cable Assembly

MC06-01-01-900

版本
EDITION

图号
SHEET