

TERMINATIONS

GPO™, 18 GHz, 1 Watt

SPECIFICATIONS:

Models TG 180M, TG 180F

RoHS
Compliant

AEROFLEX
A passion for performance.

Electrical:

Frequency Range _____ DC -18 GHz
VSWR:
DC - 18 GHz _____ 1.20:1 Max.
Impedance _____ 50 Ohms
Input Power _____ 1 Watt Avg. @ +25°C
Operating Temp Range _____ -65°C to +125°C


Mechanical:

GPO™ Connectors _____ Gold Plated Beryllium Copper
(GPO connectors Mate with SMP connectors IAW MIL-STD-348)
Conductors _____ Gold Plated Beryllium Copper
Housing _____ Gold Plated Brass

GPO™ is a Trademark of Corning Gilbert Inc.


Model Numbers: **TG180M**

GPO™ Male Connector

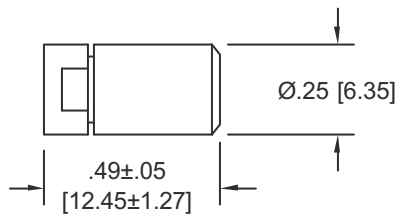

Model Numbers: **TG180F**

GPO™ Female Connector

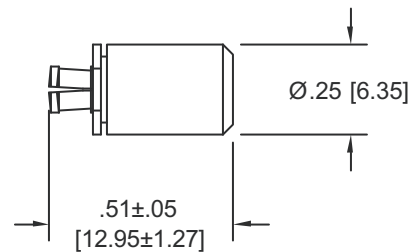

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design, specifications are subject to change without notice. Contact factory for technical specifications before purchasing or use.

TG 180: REV G (M)

AEROFLEX
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@eroflex.com