
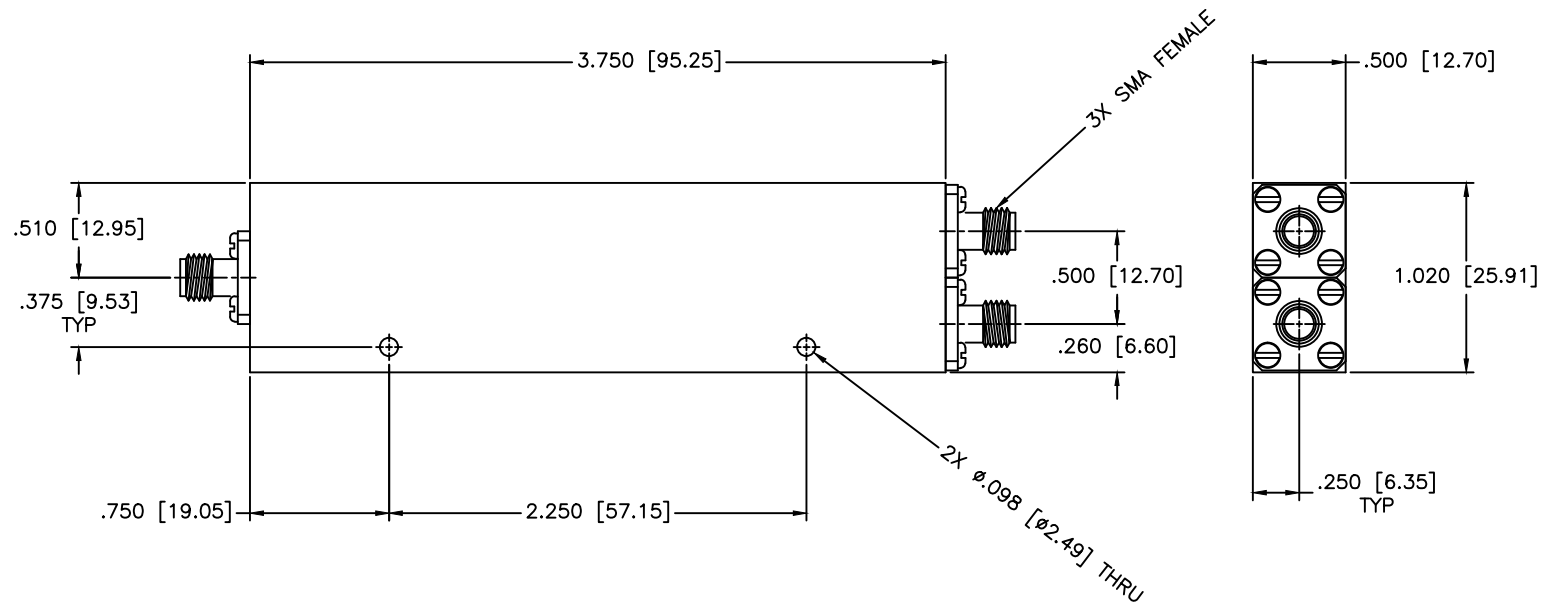


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED



SPECIFICATIONS

Frequency Range: 1–26.5 GHz
 VSWR: 1.50:1 Max.
 Amplitude Balance: $\pm 0.3\text{dB}$ Max.
 Phase Balance: ± 3 Deg. Max.
 Insertion Loss: 1.9dB Max.
 Isolation: 20dB Min.
 Power Rating: 10W Avg, 3kW Peak
 Operating Temperature: -32°C to $+85^{\circ}\text{C}$

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^{\circ}$		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 02-16-2011		DRAWING TITLE: 2-WAY POWER DIVIDER
APPROVED: T. Nguyen		DATE: 02-16-2011		PART NO.: PS2-198
THIRD ANGLE PROJECTION 		CAGE CODE: OD2L5	SIZE: N/A	REV: N/A
		DO NOT SCALE THE DRAWING		DWG. NO.: 85537