

Coaxial

Voltage Controlled Oscillator

ZX95-6520C+

Frequency Doubling 6385 to 6520 MHz

Features

- frequency based on multiplication of carrier frequency
- low phase noise
- low pushing
- low pulling
- protected by US patent 6,790,049



CASE STYLE: GB956

Applications

- r & d
- lab
- instrumentation
- wireless communications
- wireless broadband access

| Connectors | Model | Price | Qty. |
|------------|---------------|-------------|-------|
| SMA | ZX95-6520C-S+ | \$54.95 ea. | (1-9) |

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications


| MODEL NO. | FREQ. (MHz) | | POWER OUTPUT (dBm) | PHASE NOISE dBc/Hz SSB at offset frequencies, kHz | | | | TUNING | | | | | NON HARMONIC SPURIOUS (dBc) | HARMONICS (dBc) Max. | | | PULLING pk-pk @ 12 dB (MHz) | PUSHING (MHz/V) | DC OPERATING POWER | |
|-------------|-------------|------|--------------------|---|------|------|------|-------------------|-----------------------|---------------|---------------------------------|------|-----------------------------|----------------------|-----|-------------|-----------------------------|-----------------|--------------------|------|
| | F 2X(1/2F) | | | Typ. | | | | VOLTAGE RANGE (V) | SENSI- TIVITY (MHz/V) | PORT CAP (pF) | 3 dB MODULATION BANDWIDTH (MHz) | F0.5 | | F1.5 | F2 | Vcc (volts) | | | Current (mA) | |
| | Min. | Max. | | 1 | 10 | 100 | 1000 | | | | | | | | | | | | | Min. |
| ZX95-6520C+ | 6385 | 6520 | +2 | -72 | -100 | -123 | -143 | 0.5 | 4.5 | 77-92 | 13 | 260 | -90 | -17 | -14 | -19 | 2.0 | 2.5 | 5 | 35 |

Maximum Ratings

| | |
|--------------------------------------|----------------|
| Operating Temperature | -55°C to 85°C |
| Storage Temperature | -55°C to 100°C |
| Absolute Max. Supply Voltage (Vcc) | 6.5V |
| Absolute Max. Tuning Voltage (Vtune) | 6.5V |
| All specifications | 50 ohm system |

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

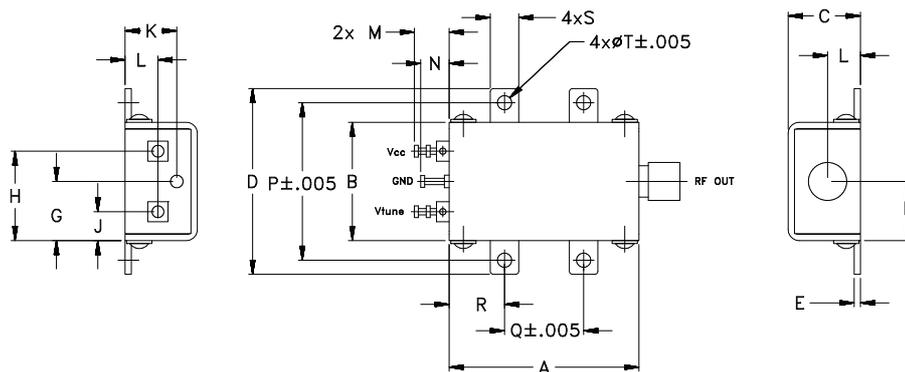

Outline Dimensions (inch/mm)

| A | B | C | D | E | F | G | H | J | K | L | M | N | P | Q | R | S | T | wt. |
|-------|-------|-------|-------|------|------|------|-------|------|------|------|------|------|-------|-------|------|------|------|-------|
| 1.20 | .75 | .46 | 1.18 | .04 | .38 | .38 | .57 | .18 | .33 | .21 | .22 | .18 | 1.00 | .50 | .35 | .18 | .106 | grams |
| 30.48 | 19.05 | 11.68 | 29.97 | 1.02 | 9.65 | 9.65 | 14.48 | 4.57 | 8.38 | 5.33 | 5.59 | 4.57 | 25.40 | 12.70 | 8.89 | 4.57 | 2.69 | 35.0 |



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.







REV. A
M140028
EDR-9302/3MPF2
ZX95-6520C+
RAV
130107
Page 1 of 2

Performance Data & Curves*

ZX95-6520C+

| V TUNE | TUNE SENS (MHz/V) | FREQUENCY (MHz) | | | POWER OUTPUT (dBm) | | | Icc (mA) | HARMONICS (dBc) | | | FREQ. PUSH (MHz/V) | FREQ. PULL (MHz) | PHASE NOISE (dBc/Hz) at offsets | | | | FREQ OFFSET (KHz) | PHASE NOISE at 6453 MHz (dBc/Hz) |
|--------|-------------------|-----------------|--------|--------|--------------------|-------|-------|----------|-----------------|-------|-------|--------------------|------------------|---------------------------------|--------|--------|--------|-------------------|----------------------------------|
| | | -55°C | +25°C | +85°C | -55°C | +25°C | +85°C | | F0.5 | F1.5 | F2 | | | 1kHz | 10kHz | 100kHz | 1MHz | | |
| 0.00 | 73.25 | 6264.7 | 6245.9 | 6229.3 | -0.32 | -1.01 | -3.11 | 24.52 | -24.5 | -20.8 | -25.5 | 1.84 | 2.61 | -74.7 | -101.3 | -122.1 | -142.1 | 1.0 | -71.97 |
| 0.25 | 67.92 | 6282.0 | 6264.2 | 6248.5 | 0.18 | -0.67 | -2.20 | 24.65 | -24.8 | -20.7 | -26.2 | 1.93 | 2.19 | -75.2 | -101.4 | -122.7 | -142.4 | 2.0 | -81.13 |
| 0.50 | 65.72 | 6298.9 | 6281.2 | 6266.0 | -0.19 | -0.24 | -1.83 | 24.78 | -25.1 | -21.1 | -25.4 | 1.98 | 1.63 | -74.8 | -101.6 | -123.1 | -143.2 | 3.5 | -88.20 |
| 0.75 | 67.18 | 6315.5 | 6297.6 | 6282.6 | 0.83 | -0.29 | -1.40 | 24.88 | -24.7 | -21.5 | -26.5 | 2.10 | 1.24 | -75.4 | -101.6 | -122.9 | -143.1 | 5.0 | -92.32 |
| 1.00 | 66.09 | 6331.8 | 6314.4 | 6298.8 | 1.15 | 0.30 | -1.29 | 24.98 | -24.7 | -21.1 | -26.5 | 2.14 | 1.44 | -73.7 | -101.1 | -122.5 | -143.3 | 7.1 | -96.43 |
| 1.25 | 66.43 | 6348.2 | 6330.9 | 6315.4 | 1.35 | 0.77 | -1.21 | 25.09 | -24.8 | -22.5 | -26.0 | 2.19 | 1.16 | -75.1 | -101.5 | -123.2 | -142.6 | 8.5 | -98.36 |
| 1.50 | 68.17 | 6365.0 | 6347.5 | 6332.0 | 1.32 | 0.99 | -0.54 | 25.20 | -25.0 | -23.1 | -27.3 | 2.22 | 0.34 | -73.2 | -101.0 | -122.9 | -143.5 | 20.8 | -108.32 |
| 1.75 | 70.75 | 6382.2 | 6364.6 | 6348.8 | 1.79 | 0.98 | -0.27 | 25.30 | -25.5 | -22.1 | -26.6 | 2.33 | 1.79 | -73.4 | -100.6 | -123.2 | -143.4 | 35.5 | -113.77 |
| 2.00 | 71.96 | 6399.8 | 6382.3 | 6366.0 | 2.09 | 1.34 | -0.27 | 25.42 | -26.2 | -23.9 | -26.5 | 2.34 | 2.81 | -73.8 | -101.2 | -123.4 | -143.6 | 60.7 | -118.61 |
| 2.25 | 76.96 | 6418.5 | 6400.3 | 6384.0 | 1.87 | 1.68 | 0.01 | 25.52 | -26.7 | -24.7 | -28.0 | 2.43 | 3.21 | -72.4 | -100.5 | -123.2 | -142.9 | 72.5 | -120.21 |
| 2.50 | 79.28 | 6437.6 | 6419.5 | 6402.4 | 2.64 | 1.29 | 0.36 | 25.62 | -26.4 | -23.0 | -26.1 | 2.60 | 2.83 | -73.0 | -100.4 | -123.0 | -142.9 | 86.7 | -122.02 |
| 2.75 | 81.88 | 6457.5 | 6439.3 | 6422.0 | 2.94 | 2.11 | -0.09 | 25.75 | -27.2 | -24.8 | -27.9 | 2.54 | 2.42 | -72.3 | -100.7 | -123.6 | -143.9 | 148.1 | -126.93 |
| 3.00 | 86.74 | 6478.5 | 6459.8 | 6442.4 | 2.62 | 2.37 | 0.66 | 25.85 | -27.0 | -25.1 | -27.8 | 2.60 | 1.85 | -72.2 | -100.4 | -123.2 | -143.5 | 177.0 | -128.07 |
| 3.25 | 92.18 | 6501.0 | 6481.5 | 6463.4 | 2.81 | 2.11 | 0.95 | 25.95 | -26.2 | -24.3 | -26.7 | 2.64 | 0.90 | -71.5 | -99.8 | -123.0 | -143.1 | 211.6 | -129.81 |
| 3.50 | 90.80 | 6523.4 | 6504.5 | 6485.5 | 3.31 | 1.88 | 0.72 | 26.10 | -25.8 | -24.0 | -27.2 | 2.33 | 0.44 | -71.6 | -99.9 | -123.1 | -143.3 | 302.4 | -132.82 |
| 3.75 | 96.10 | 6547.4 | 6527.2 | 6508.9 | 3.17 | 2.43 | 0.02 | 26.18 | -27.0 | -24.0 | -27.7 | 2.16 | 2.60 | -70.5 | -99.2 | -122.4 | -142.8 | 361.5 | -134.41 |
| 4.00 | 96.08 | 6571.9 | 6551.2 | 6531.7 | 2.16 | 2.32 | 0.89 | 26.29 | -27.4 | -23.6 | -27.2 | 1.62 | 3.01 | -69.8 | -98.2 | -121.9 | -142.6 | 507.5 | -137.54 |
| 4.25 | 90.58 | 6594.9 | 6575.3 | 6555.5 | 2.99 | 1.27 | 0.74 | 26.43 | -26.4 | -21.3 | -26.1 | 0.80 | 1.94 | -69.4 | -98.1 | -121.6 | -141.4 | 606.7 | -138.83 |
| 4.50 | 91.16 | 6618.8 | 6597.9 | 6579.0 | 2.44 | 2.01 | -0.24 | 26.52 | -27.0 | -23.4 | -27.0 | 0.04 | 1.47 | -68.1 | -96.3 | -120.2 | -140.8 | 851.6 | -141.94 |

*at 25°C unless mentioned otherwise

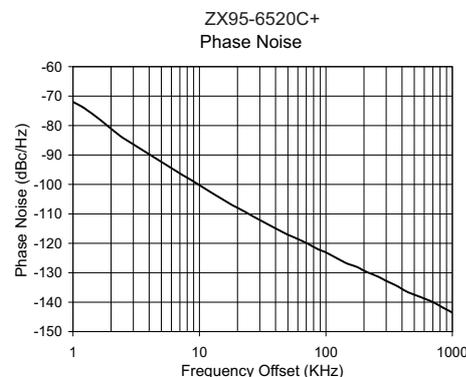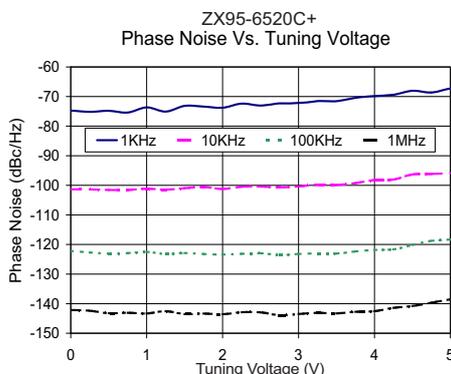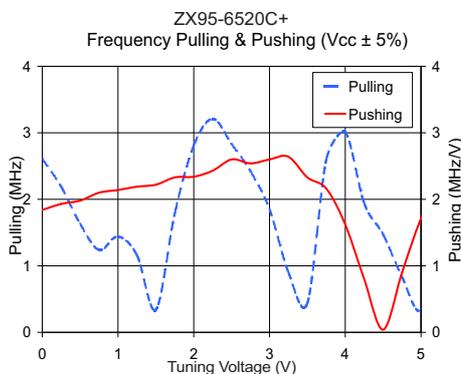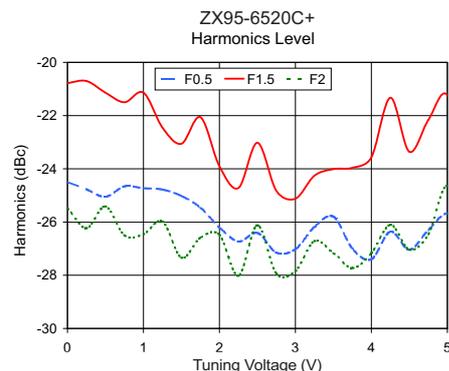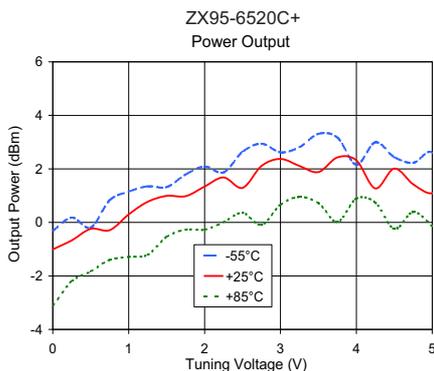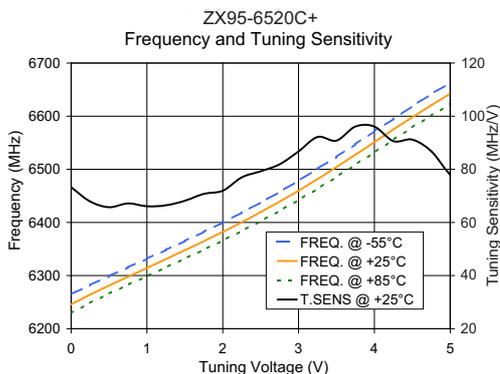

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.