
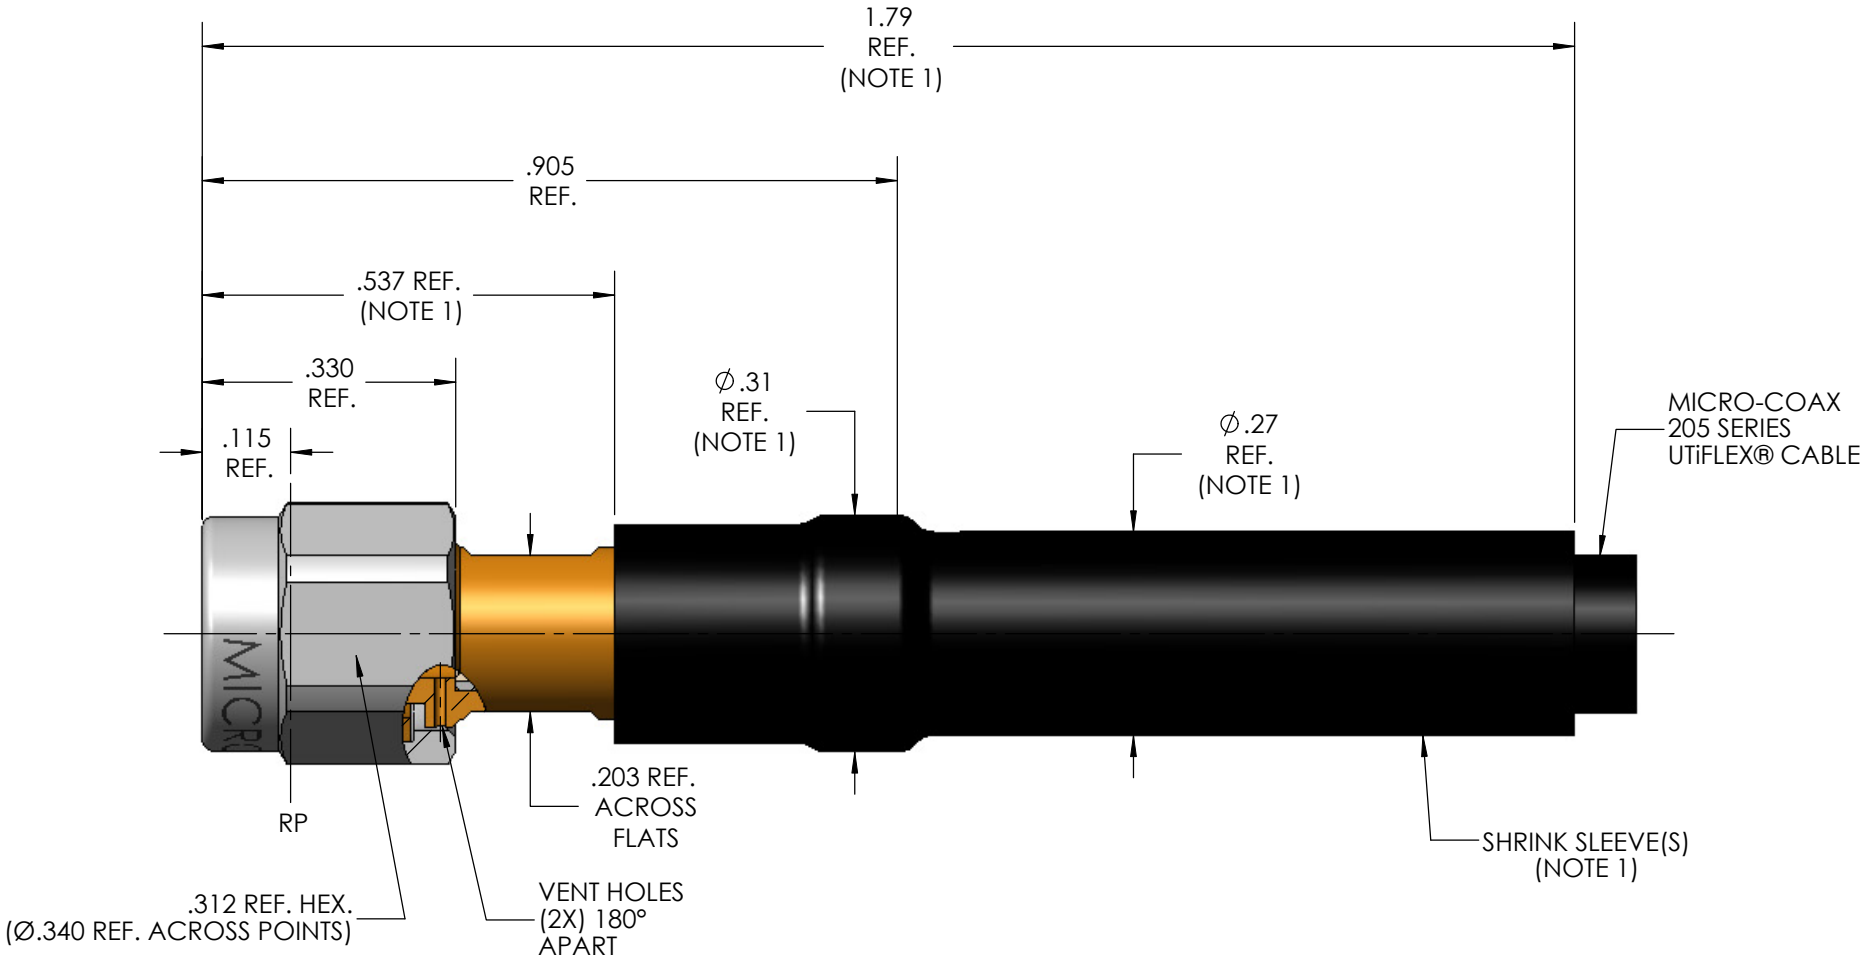


MECHANICAL CHARACTERISTICS	
INTERFACE	MIL-STD-348, FIGURE 323.1
IN ACCORDANCE WITH THE INTENT OF SLANT SHEET	IEEE P287/D3
RECOMMENDED MATING TORQUE	9 IN-LBS. NOM.
COUPLING PROOF TORQUE	15 IN-LBS MIN.
COUPLING NUT RETENTION	60 LBS. MIN.
FORCE TO ENGAGE	2 LBS. MAX.
FORCE TO DISENGAGE	2 LBS. MIN.
DURABILITY	500 CYCLES MIN.
AXIAL CONTACT RETENTION (FROM INTERFACE)	6 LBS. MIN.
AXIAL CONTACT RETENTION (FROM CABLE)	6 LBS. MIN.
CABLE RETENTION	30 LBS. MIN.
MASS	3.37 GRAMS NOM.
ELECTRICAL CHARACTERISTICS	
IMPEDANCE	50 Ohms NOM.
MAXIMUM FREQUENCY	26.5 GHz
VSWR DC - 18 GHz	1.16:1 MAX.
18 - 26.5GHz	1.20:1 MAX
INSERTION LOSS	0.03 √F (GHz)dB MAX.
DIELECTRIC WITHSTANDING VOLTAGE	950 Vrms MIN.
INSULATION RESISTANCE	5000 MegaOhms MIN.
RF LEAKAGE DC - 18 GHz	-90 dB MIN.
18 GHz - 26 GHz	TBD
CORONA	250 Vrms MIN. @ 70,000 FEET
RF HIGH POTENTIAL	625 Vrms MIN.
CONTACT RESISTANCE (INNER)	3.0 MilliOhms MAX.
CONTACT RESISTANCE (OUTER)	2.0 MilliOhms MAX.
ENVIRONMENTAL CHARACTERISTICS	
OPERATING TEMPERATURE	-65 °C TO 165 °C
VIBRATION	MIL-STD-202, METHOD 204, CONDITION D
MECHANICAL SHOCK	MIL-STD-202, METHOD 213, CONDITION I
THERMAL SHOCK	MIL-STD-202, METHOD 107, CONDITION B
MOISTURE RESISTANCE	MIL-STD-202, METHOD 106, CONDITION (NO VIBRATION)
CORROSION	MIL-STD-202, METHOD 101, CONDITION B, 5%
MATERIALS AND FINISH	
COUPLING NUT & SLEEVE	STEEL, CORROSION RESISTANT, PER ASTM-A-582, UNS NO. S30300, PASSIVATED PER ASTM-A-967
SNAP RING	BERYLLIUM COPPER, PER ASTM-B-197
CONTACT & BODY	BERYLLIUM COPPER, ASTM-B-196 GOLD PLATED PER MIL-DTL-45204, OVER NICKEL PLATE PER AMS-QQ-N-290
DIELECTRIC BEAD	POLYETHERIMIDE THERMOPLASTIC, PER ASTM-D-5205
DIELECTRIC STOP	TFE FLUOROCARBON PER ASTM-D-1710
APPLICATION	
CABLE(S)	205 SERIES CABLE
INSTALLATION	PER CONFIGURATOR

**THIS DRAWING IS PROPRIETARY AND CONFIDENTIAL.**

REV	DESCRIPTION	DATE	BY	APPVD	CHKD
A	INITIAL RELEASE - ECO 125400	7/25/2012	MJM	RS	CCF

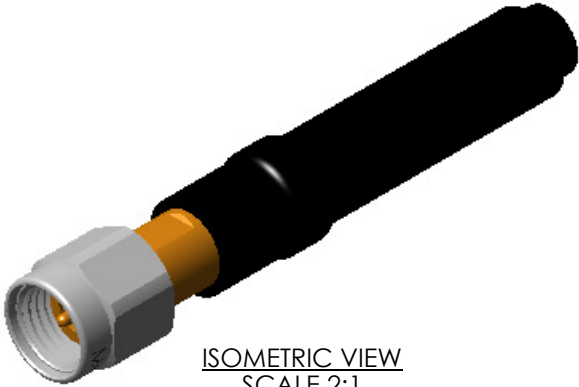

NOTE:

1. MARKER LOCATION ON THIS DRAWING IS FOR REFERENCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

THIS SPECIFICATION IS THE PROPERTY OF MICRO-COAX, INC. AND MAY NOT BE USED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRO-COAX, INC.		INITIALS		DATE		<div><b>MICRO-COAX<sup>®</sup></b> <i>Leading the way in transmission line solutions.</i> <i>Copyright Micro-Coax, Inc.</i></div>					
		DWN.	MJM	2/22/12							
		CHKD.	MJM	2/22/12							
		APPVD.									
TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE									
		2.92 PLUG, VENTED, 205 SERIES CABLE									
.XX	± .02	ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. SCREW THDS. TO BE IN ACCORD WITH ANSI B1.1-1989.		FSCM NO.  64639	SIZE  B	SCALE  4:1	SHEET NO.  1 OF 1	DRAWING NO.  SD904750	REV  A		
.XXX	± .005										
.XXXX	± .0010										
ANGLES	± 2°										