
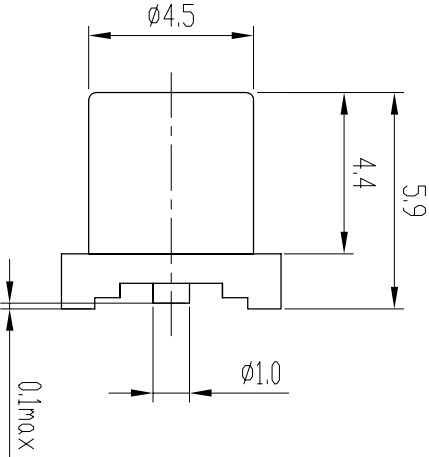


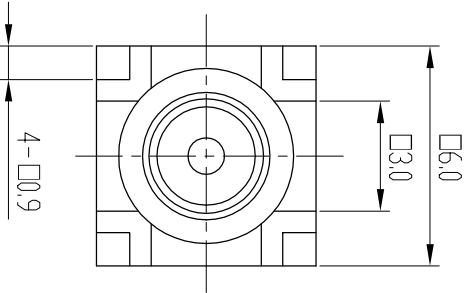

Electrical Characteristics:

- 1. Characteristic Impedance: 50 Ω
- 2. Frequency range: DC~3Ghz
- 3. Contact resistance
- Center conductor: ≤5.0 mΩ
- Out conductor: ≤2.5 mΩ
- 4. Insulation resistance: ≥1000MΩ
- 5. Insulator withstand: 750V
- 6. Durability: 500cycles

Application:IEC 601169-36

Material&Finishing

- 1. Center contact :
Female:beryllium copper, gold plated
- 2. Body:brass, gold plated
- 3. Insulators:PTFE

主要性能指标:

- 1. 特性阻抗: 50 Ω
- 2. 频率范围: DC~3Ghz
- 3. 接触电阻:
中心导体: ≤5.0 mΩ
- 外导体: ≤2.5 mΩ
- 4. 绝缘电阻: ≥1000MΩ
- 5. 介质耐压: 750V
- 6. 插拔次数: 500次

执行标准:IEC 601169-36

材料和镀层

- 1. 中心接触件:
插孔:铍青铜, 镀金
- 2. 壳体:黄铜, 镀金
- 3. 绝缘子:聚四氟乙烯

	SCALE		MCX-KHT	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm , TOLERANCES ARE FRACTIONS DECIMALS ANGLES
		5:1		
	NAME	DATE	RF COAXIAL CONNECTOR	X± .15 XX± .05 XXX±
DRAWN				
CHECKED				
APPROVED			西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.	