




250 W For integration



Standards
NF C 96-315
MIL-DTL-39030



Impedance 50 Ω ±5%
Frequency DC-1.5 GHz
Temperature range -55°C to +150°C
Average power @ 85°C* 250W
Base plate housing / Finition Al / Ni Ag

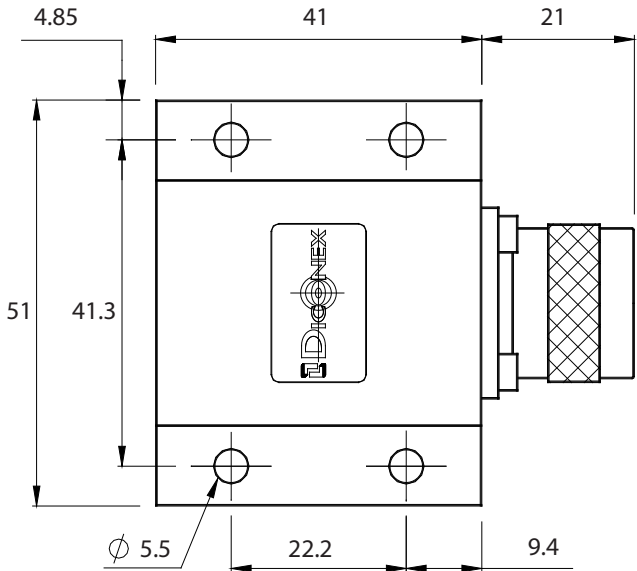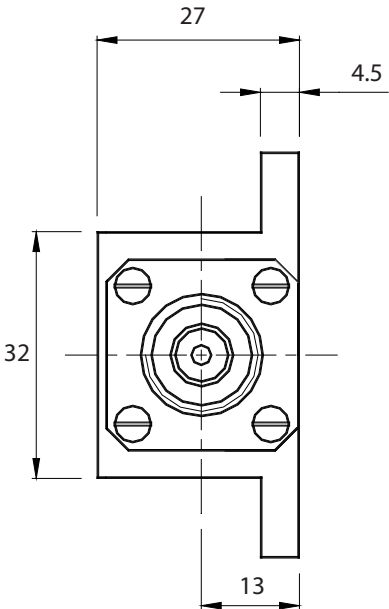

Dimensions in mm

P/N	Connector	Frequency (GHz)	Power (W)	Impedance (± 5%)	Max VSWR
17-0504	N m	1.5	250	50	1.25
17-0548	N f	1.5	250	50	1.25

mm	inch
51	2
41.3	1.625
41	1.614
32	1.260
27	1.062
22.2	0.874
21	0.827
13	0.512
9.4	0.370
5.5	0.216
4.85	0.191
4.5	0.177