


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

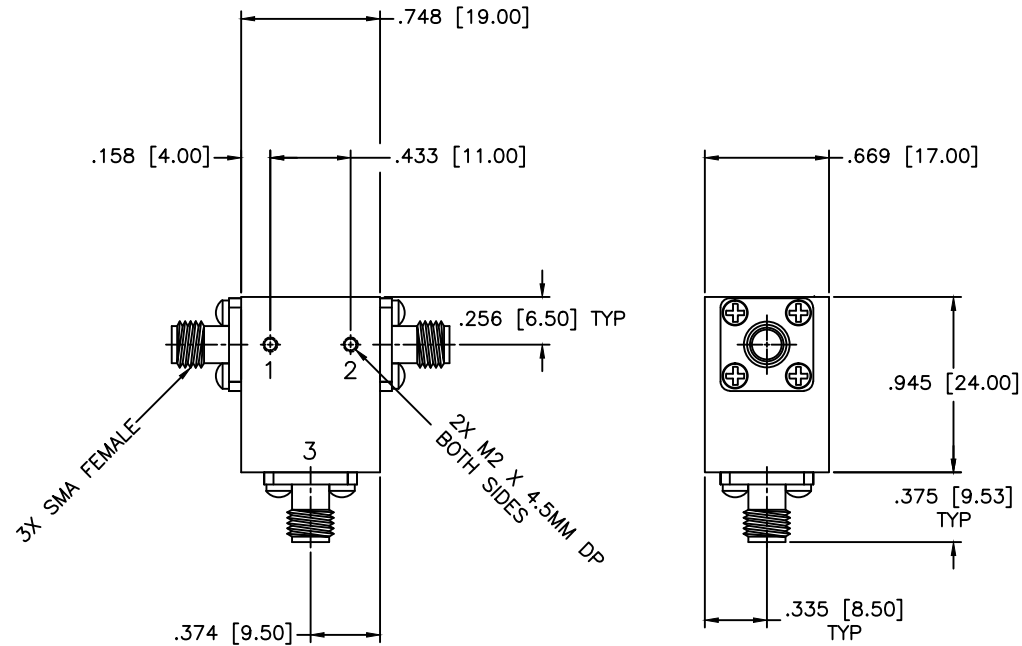

SPECIFICATIONS

Frequency Range: 5–10 GHz
 Isolation: 17dB Min.
 Insertion loss: 0.6dB Max.
 VSWR: 1.35:1 Max.
 Power: 50W Avg, 100W Peak
 Operating Temperature –30°C to +70°C
 Hermetically Sealed
 R.O.H.S. compliant

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.05$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paitoon Luekhamhan DATE: 09-13-2010 APPROVED: T. Nguyen DATE: 09-13-2010		DRAWING TITLE: COAXIAL CIRCULATOR PART NO. CS-22		
		CAGE CODE: OD2L5	SIZE: A REV: A DO NOT SCALE THE DRAWING	DWG NO. 82554