





Standards  
NF C 96-315  
MIL-DTL-39030

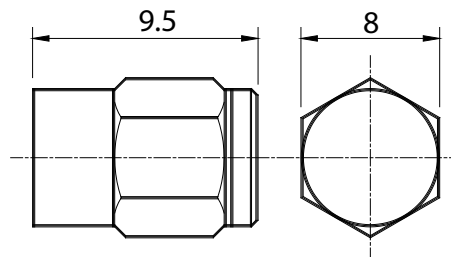

|                          |                                 |
|--------------------------|---------------------------------|
| Impedance                | 50 $\Omega \pm 5\%$             |
| Frequency                | DC - 18 GHz                     |
| Max VSWR                 | See table below                 |
| Temperature range        | -55 to +125°C                   |
| Average power            | 1 W                             |
| Connector body / plating | SMA male stainless steel / gold |

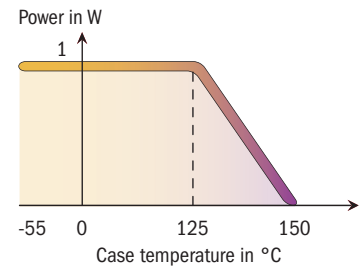

Dimensions in mm

| P/N     | Connector |
|---------|-----------|
| 17-3620 | SMA m     |

| Frequency (GHz) | Max VSWR |
|-----------------|----------|
| 4               | 1.05     |
| 10              | 1.10     |
| 14              | 1.15     |
| 18              | 1.25     |

