


FEATURES

- Low Profile Surface Mount Package
- High Power
- Low Insertion Loss
- High Isolation
- 100% Tested

APPLICATIONS

- Power Amplifiers
- Modulator
- Demodulator
- Signal Distribution Network
- Antenna Feeds
- Switch Networks

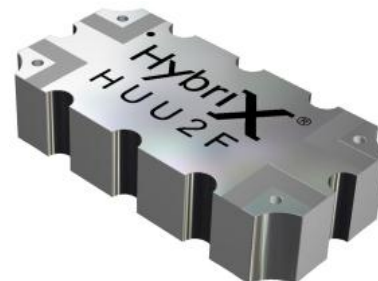

GENERAL DESCRIPTION

Florida RF Labs offers high performance hybrid couplers in a low profile, surface mount package. These couplers are designed for demanding applications where high power, low loss and excellent isolation are required.

SPECIFICATIONS

1.0 ELECTRICAL

Frequency	Isolation	Insertion Loss	VSWR	Amplitude Balance	Phase Balance	Power Handling
5000 to 6000 MHz	25 dB Min	0.22 dB Max	1.18 Max	± 0.25 dB Max	90° ± 3	25 Watts CW

2.0 MECHANICAL

Operating Temperature: -55 °C to 85 °C
 Substrate: PTFE
 Conductor: Copper
 Plating: Immersion Tin
 Application Note: AN0030 (General Hybrid And Directional Coupler)

3.0 UNIT MARKING

Logo, Part Number and Pin 1 Identification

4.0 PACKAGING

Standard: Tape And Reel

5.0 PART NUMBERING


Part Identifier: HUU2F

PIN CONFIGURATION



Port	J1	J2	J3	J4
J1	-	Iso	-90°	0°
J2	Iso	-	0°	-90°
J3	-90°	0°	-	Iso
J4	0°	-90°	Iso	-

MECHANICAL OUTLINE

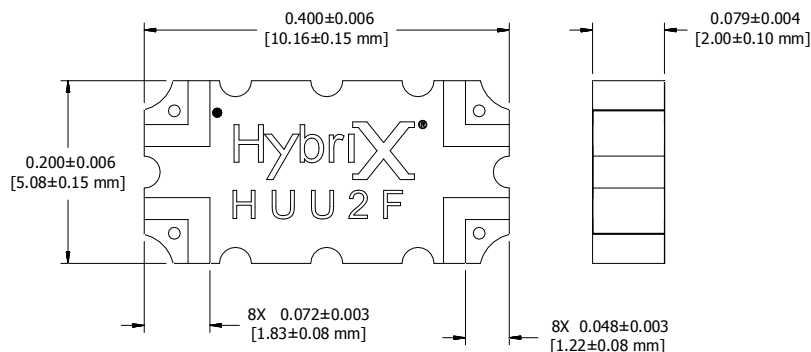


Note: Specifications are subject to change without notice.


Unless Otherwise Specified: TOLERANCE: .XXX = ± .010

6.0 TYPICAL PERFORMANCE AT 25 °C


COUPLING

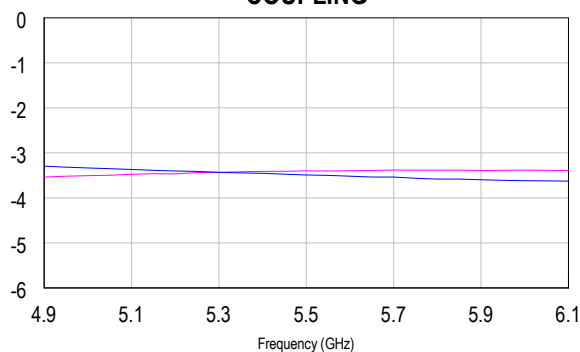


AMPLITUDE BALANCE

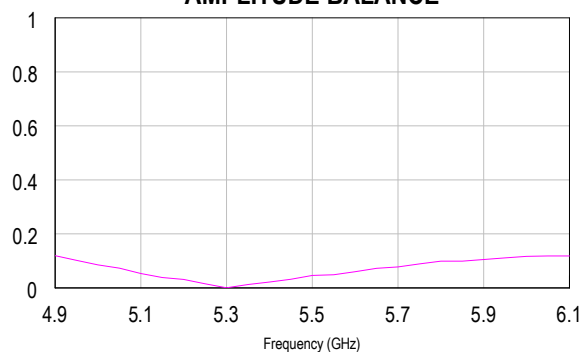


INSERTION LOSS

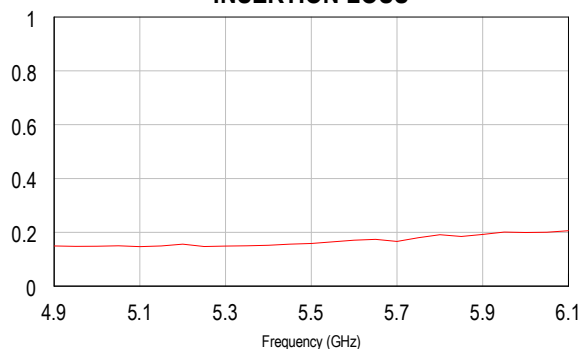

ISOLATION

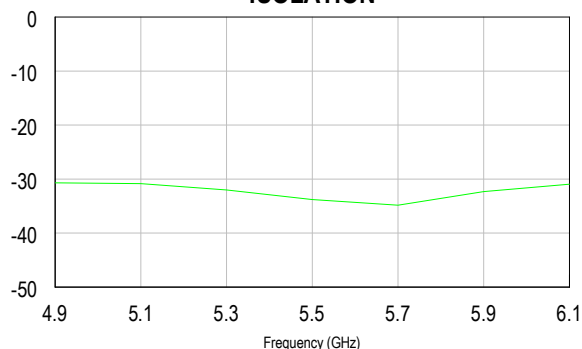

VSWR ALL PORTS

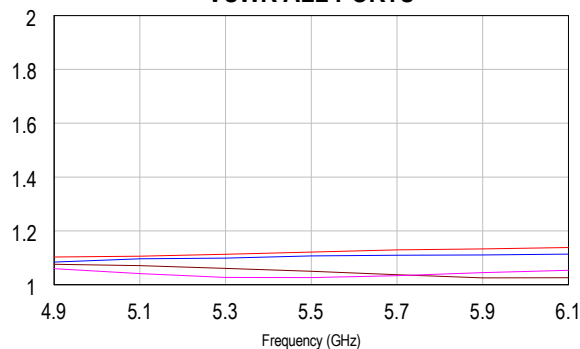

PHASE BALANCE

