


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

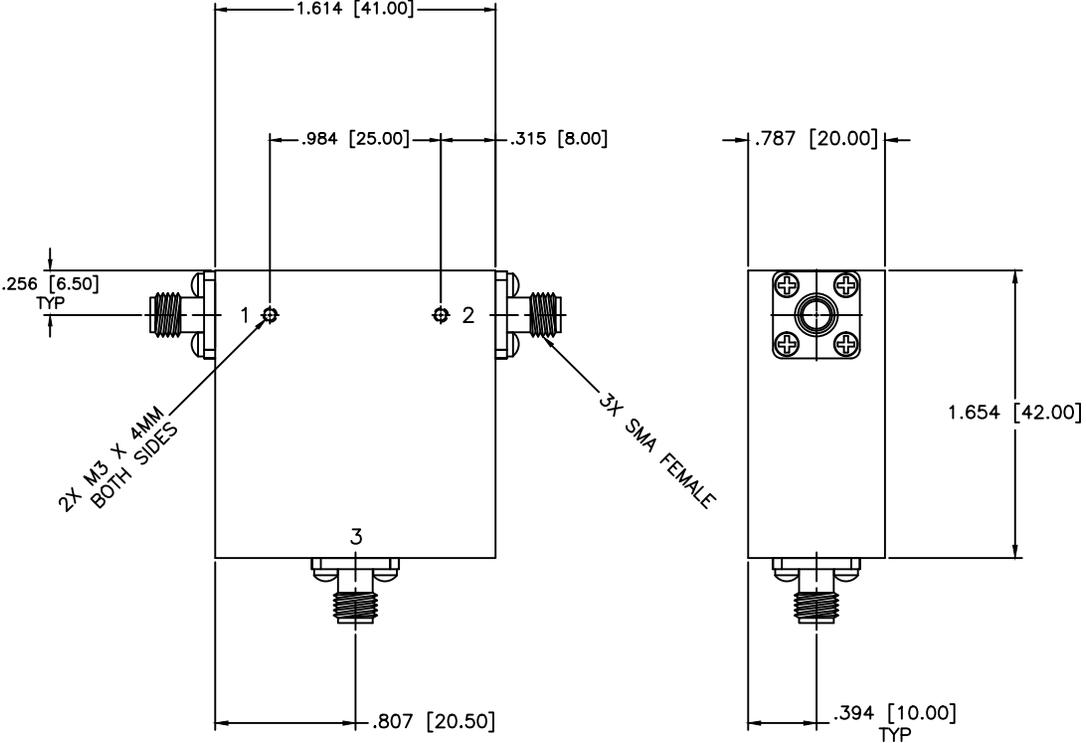

SPECIFICATIONS

Frequency Range: 2–6 GHz
 Isolation: 13dB Min.
 Insertion loss: 1.0dB Max.
 VSWR: 1.60:1 Max.
 Operating Temperature: -10°C to +70°C
 Power Average: 20 Watts

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 08-16-2011
APPROVED: T. Nguyen	DATE: 08-16-2011

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .01 ± .005 ANGLE: ± 1/2°		SHEET:	N/A
DRAWING TITLE: COAXIAL CIRCULATOR		PART NO. CS-144		
CAGE CODE: OD2L5		SIZE:	N/A	REV:
THIRD ANGLE PROJECTION 		REV:	N/A	DWG NO. 85819
DO NOT SCALE THE DRAWING				