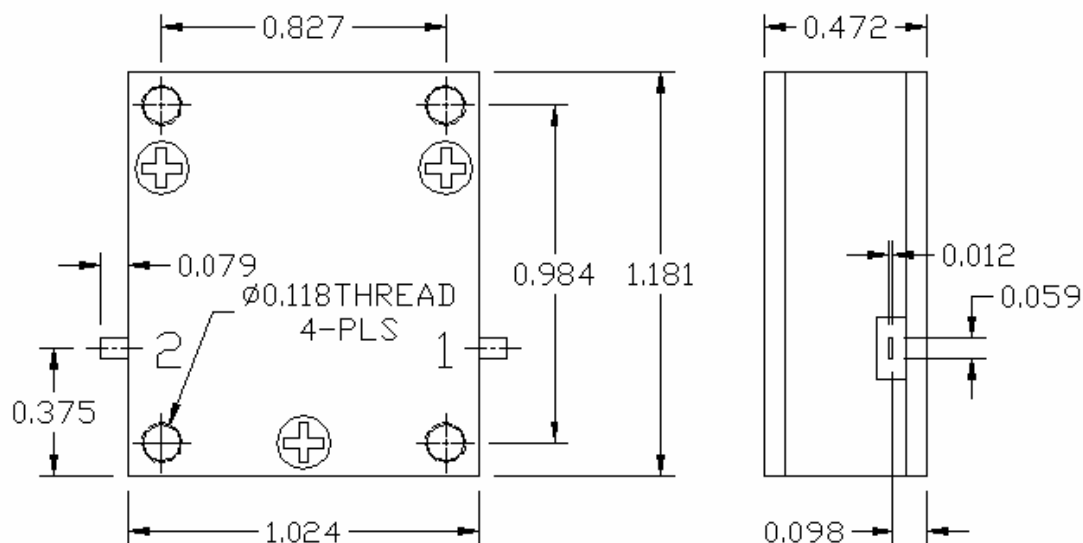


Key Features:

- Frequency range: 2.5~3.8MHz, 200MHz bandwidth
- Drop-in configuration
- Small size, low cost
- Power handling +5 Watts
- Operating temperature -30~+60°C
- Customer specify center frequency and bandwidth

**Electrical Specifications**

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Reverse Power, Watts	Temp. Range, °C
F1102-0290-07	2.8~2.9	0.5 Max	≥ 20	≤ 1.2	≥ 5	≥ 5	-30 ~ +60
F1102-0300-07	2.9~3.1	0.5 Max	≥ 20	≤ 1.2	≥ 5	≥ 5	-30 ~ +60
F1102-0330-06	3.2~3.4	0.5 Max	≥ 20	≤ 1.2	≥ 5	≥ 5	-30 ~ +60
F1102-0360-11	3.4~3.8	0.5 Max	≥ 20	≤ 1.2	≥ 5	≥ 5	-30 ~ +60

Mechanical Structure:

Note: All units in inches.

Ordering Information:

F1102-XXXX-XX
 ↓ ↓
 Bandwidth, XX%,
 Frequency XX.XX GHz,