


剥线尺寸
stripping dimension

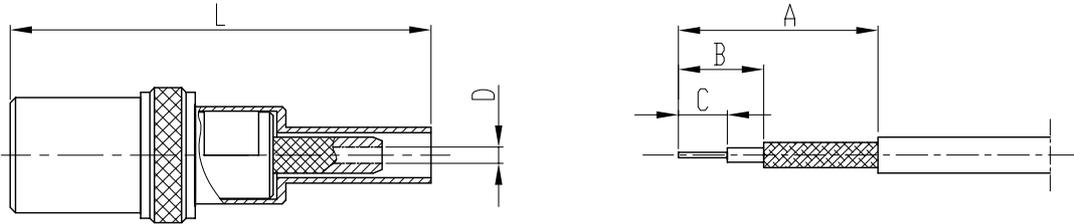

产品型号 type	A	B	C	D	L	电缆型号 cable type
SMB-K2	11.0	4.7	2.7	∅0.9	23.2	SFF-50-1、RG178/U
SMB-K3				∅1.6	24.2	SFF-50-1.5-1、RG316/U
SMB-K3-B				∅1.6	24.2	
SMB-K4	10.5	4.0	1.8	∅2.3	25.7	SFF-50-2-1
SMB-K5	11.0	4.0	2.5	∅3.1	26.2	SFF-50-3-1、RG141A/U、RG58C/U

Electrical Characteristics:

1. Characteristic Impedance: 50 Ω
2. Frequency range: DC~3Ghz
3. Contact resistance
Center conductor: ≤6.0 mΩ
Out conductor: ≤1.0 mΩ
4. Insulation resistance: ≥1000MΩ
5. Insulator withstanding: 750V
6. VSWR: ≤1.4
7. Durability: 500cycles

主要性能指标:

1. 特性阻抗: 50 Ω
2. 频率范围: DC~3Ghz
3. 接触电阻:
中心导体: ≤6.0 mΩ
外导体: ≤1.0 mΩ
4. 绝缘电阻: ≥1000MΩ
5. 介质耐压: 750V
6. 电压驻波比: ≤1.4
7. 插拔次数: 500次

Application: MIL-C-39012/68A

执行标准: MIL-C-39012/68A

Material&Finishing

材料和镀层

1. Center contact:
Female: beryllium copper, gold plated
2. Bodies: brass, gold plated
3. Crimp ferrule: copper, nickel plated
4. Insulators: PTFE

1. 中心接触件:
插孔: 铍青铜, 镀金
2. 壳体: 黄铜, 镀金
3. 线夹: 黄铜, 镀镍
4. 绝缘子: 聚四氟乙烯

 	SCALE	2.5:1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
	NAME		
SMB-K2		RF COAXIAL CONNECTOR	
DRAWN			
CHECKED			
APPROVED			
西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.			