



Model: SR-S010-1S

Description:..... SP1T, Absorptive Pin-Switch

Operating Frequency:..... 2 – 18 GHz

Insertion Loss:

2 – 12.4 GHz	12.4 - 18 GHz
2.6 dB Max	3.3 dB Max

Isolation:

2 – 12.4 GHz	12.4 - 18 GHz
65 dB Min	55 dB Min

VSWR (RF Path “ON” or “OFF”): 1.8:1 Max

Rise/Fall time (10% to 90% RF, 90% to 10% RF): ... 35 ns Max

On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF):..... 75 ns Max

Operating Power:..... CW / AVG +24 dBm Max

..... Peak: 8W @ 1μS PW Max

Control Input Characteristics: TTL /Unit-Load, Floating-High

Control Logic:..... 1-Control, Logic “0” = RF Path “ON”

Power Supplies:..... +5(±0.25) V @ 60mA Max

..... -12(±0.5) V @ 75mA Max

Connectors (RF): SMA (F), Removable

Connectors (Supplies & Controls) Solder Pins

Impedance: 50 Ohms Nominal

Quality: Best-Commercial-Grade

Environmental Ratings:

Temperature:..... {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}

Humidity: MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)

Shock: MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)

Vibration: MIL-STD-202F, Method 204D, Cond. B (.06” double amplitude, or 15G)

Altitude: MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)

Temp. Shock: MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

■ **Supply Voltages**

A1 [+5(±0.25)V / -5(±0.25)V]

A2 [+5(±0.25)V / -15(±0.5)V]

A3 [+12(±0.5)V / -12(±0.5)V]

A4 [+15(±0.5)V / -15(±0.5)V]

■ **RF Connectors**

B1 [J1 SMA(M) / J2 SMA(F)]

B2 [J1 SMA(F) / J2 SMA(M)]

B3 [All SMA(M)]

■ **Control Connectors**

C1 [SMC(Jack), 50 Ω]

C2 [SMB(Jack), 50 Ω]

■ **Control Impedance**

D1 [50 Ω, Internally Terminated]

■ **Control Function**

F1 [Inverse Logic, (“1” = Path “ON”)]

■ **Video Suppression Filter**


G1 [VF @ J2 Port <> 0.25 dB additional Loss]

G2 [VF @ J1 & J2 Ports <> 0.5 dB additional Loss]



Model: SR-S010-1S

Outline

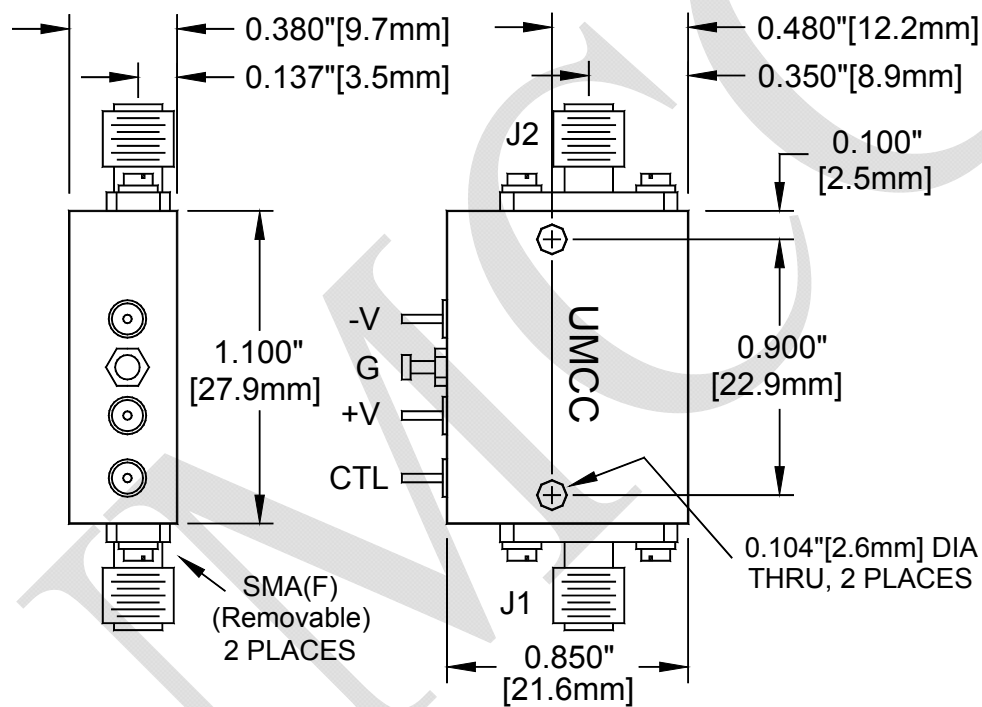

Weight	Tolerances
0.7 oz [19.8g]	±0.015" [±0.38mm]