


Anaren

RF Power

**RoHS
Compliant**

Model 250250-4AA20-1

**Surface Mount Attenuator
8 Watts**

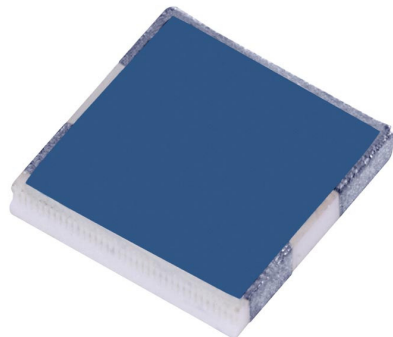

General Specifications

Resistive Element	Thick film
Substrate	Beryllium oxide ceramic
Terminals:	Matte Tin over Nickel

Electrical Specifications

Attenuation Range:	20 dB ± 0.75 dB
Frequency Range;	DC – 2.5 GHz
Power:	8 Watts
VSWR	1.25:1


Note: Tolerance is ± 0.010 ", unless otherwise specified. Designed to meet or exceed applicable portions of MIL-E-5400. Operating temperature is -55°C to 150°C (see chart for derating temperatures).
All dimensions in inches.

Specifications subject to change without notice.

Features:


- DC –2.5 GHz
- 8 Watts
- BeO Ceramic
- Non-Nichrome Resistive Element
- Low VSWR
- 100% Tested
- RoHS Compliant

Outline Drawing

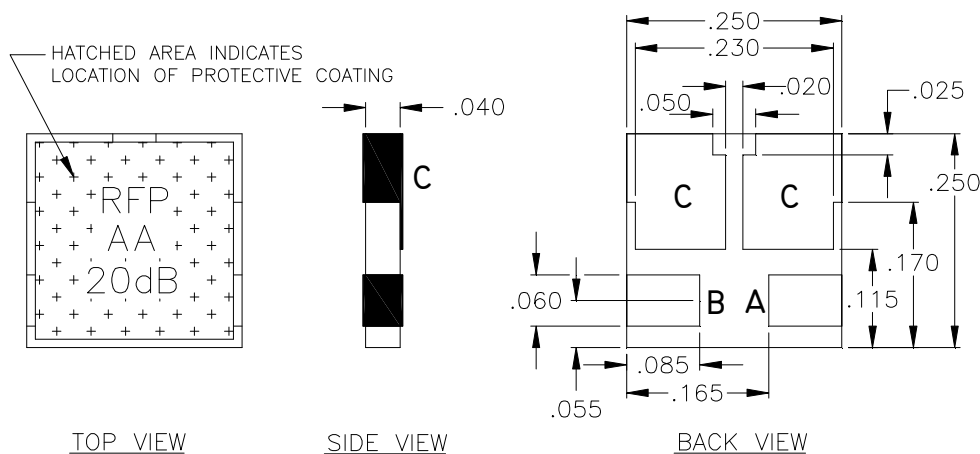

250250-4AA20 (097) Rev A

Anaren
What'll we think of next?™




Available on Tape
and Reel For Pick and
Place Manufacturing.

USA/Canada: (315) 432-8909
Toll Free: (800) 544-2414
Europe: +44 2392-232392




Typical Performance:

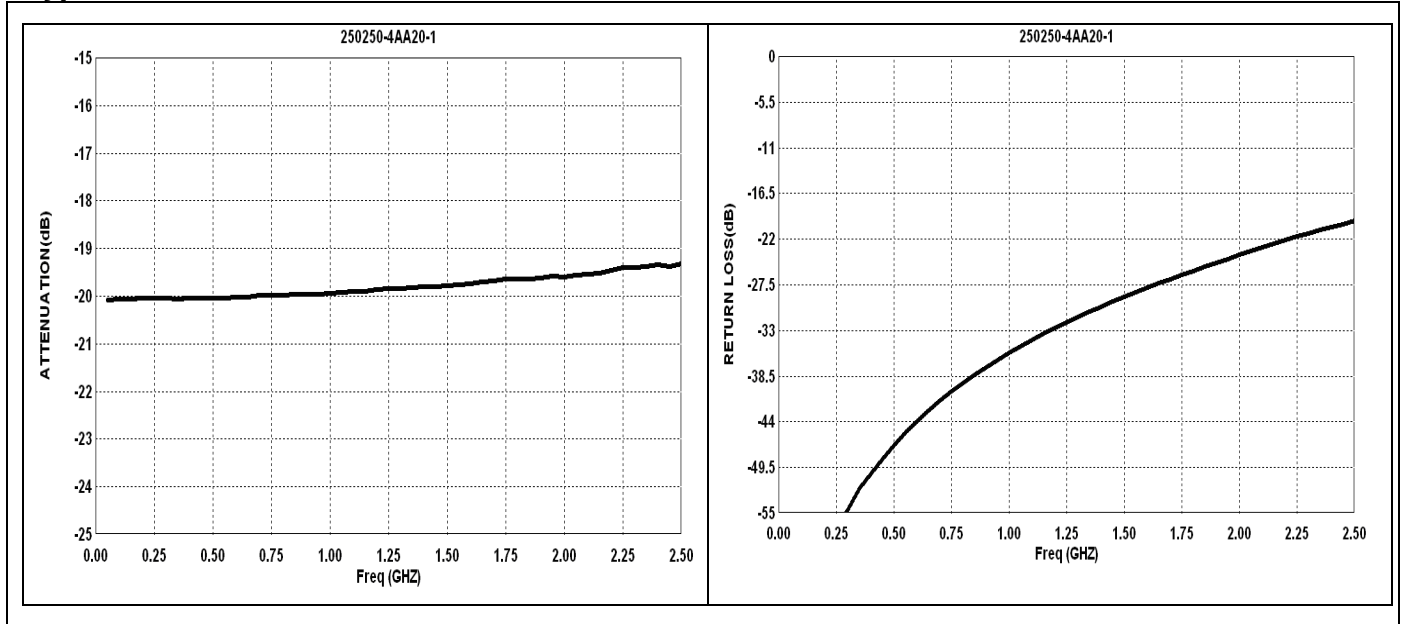

Power De-rating:


Mounting Footprint and Procedure:

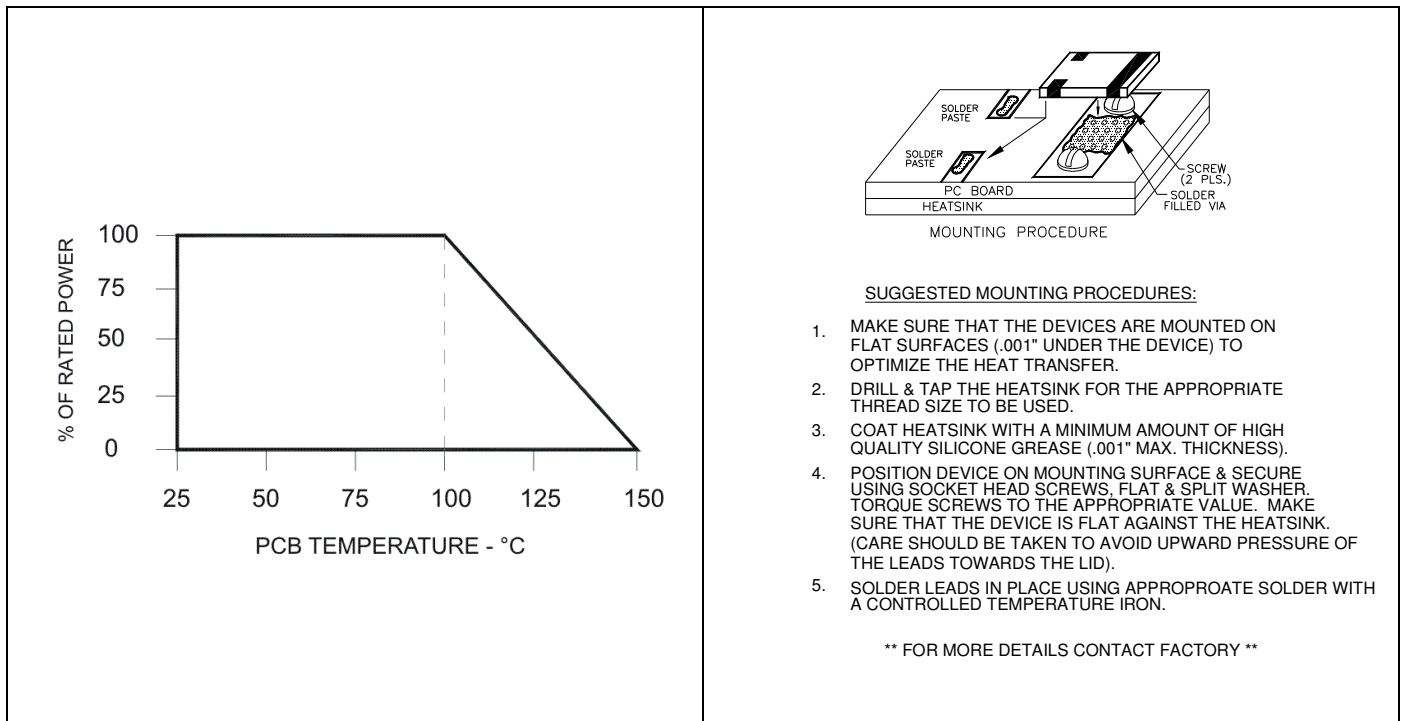

250250-4AA20 (097) Rev A

USA/Canada: (315) 432-8909
Toll Free: (800) 544-2414
Europe: +44 2392-232392

Available on Tape and
Reel For Pick and Place
Manufacturing.



Anaren
What'll we think of next?™