




REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

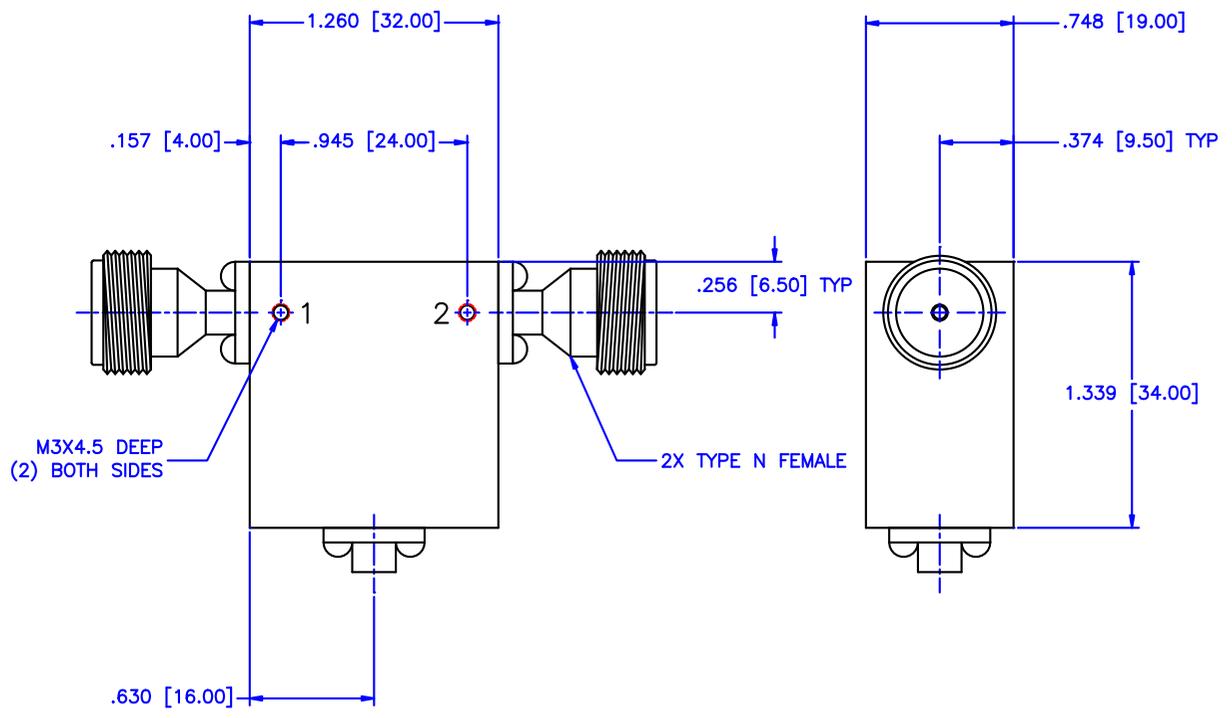

SPECIFICATIONS:

- Frequency Range: 1.03–1.09 GHz
- Operating Temperature 0°C to +70°C
- Isolation: 20dB Min.
- Insertion loss: 0.40dB Max.
- VSWR: 1.25:1 Max.
- Circulator Power
- Average/Peak: 50W / 2kW

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE:		COAXIAL ISOLATOR
DRAWN:		DATE:	PART NO.		IS-75/NF	
Paiboon Luekhamhan		06-29-2010	CAGE CODE:		SIZE:	REV: A
APPROVED:		DATE:	DWG NO.		81217	
T. Nguyen		06-29-2010	OD2L5		DO NOT SCALE THE DRAWING	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)				

