

ISOLATOR 4-8 GHZ

SFI4080A

SPECIFICATIONS

ELECTRICAL


FREQUENCY: 4-8 GHZ
IMPEDANCE: 50 OHMS
VSWR: 1.35:1 TYPICAL
LOSS: 0.5DB TYPICAL
POWER FORWARD: 10W CW
POWER REVERSE: 1W CW
ISOLATION: 18DB TYPICAL

MECHANICAL


HOUSING: ALUMINUM
CONNECTORS: SMA-F, PASSIVATED STAINLESS STEEL

TYPICAL OPERATING TEMP RANGE: +25°C

ROHS COMPLIANT

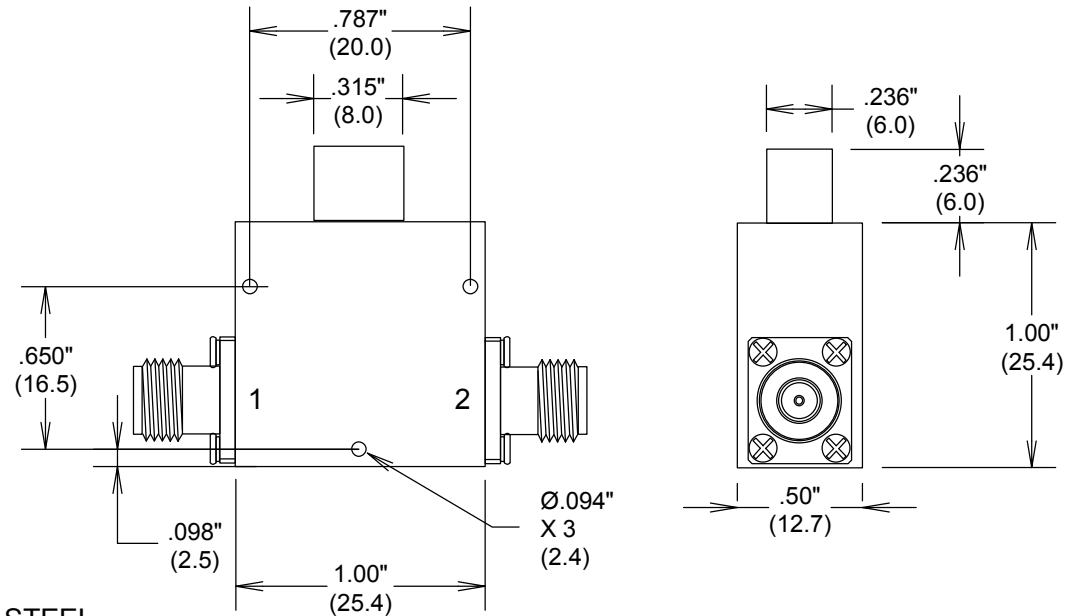

MEASUREMENTS BELOW ARE TYPICAL

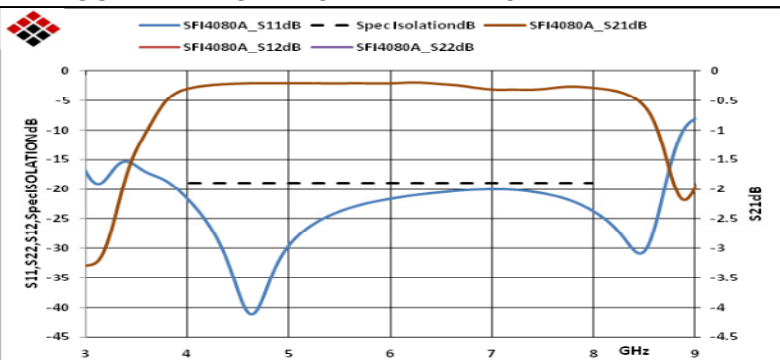

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

ISOLATOR 4-8 GHZ

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SFI4080A	A
SCALE	SHEET		